

S9931

Simplicity



easy-to-sew

Scan QR code for a Sew-Along tutorial by Norris Dánta Ford.

NORRIS DÁNTA FORD

Designed and printed in USA.

Easy

Facile

MEN'S ROBE, KNIT TANK TOP, PANTS AND SHORTS

Suggested Fabrics: Stretch Knits only such as Cotton Knits, Jersey, Lightweight Double Knits, Sweatshirting, Waffle Knits. See Pick-A-Knit® Rule. **D** also in: Chambray, Flannel, Poplin. **Interfacing D:** Lightweight Fusible.

Notions: C,D: 1½ yds. (1.3m) of 1½" (4cm) elastic.

Sizes	S (34-36)	M (38-40)	L (42-44)	XL (46-48)	XXL (50-52)
European	44-46	48-50	52-54	56-58	60-62

BODY MEASUREMENTS: Select pattern size based on body measurements

	S	M	L	XL	XXL	Ins.
Chest	34-36	38-40	42-44	46-48	50-52	"
Waist	28-30	32-34	36-39	42-44	46-48	"
Hip	35-37	39-41	43-45	47-49	51-53	"

Tank Top A	60**	1½	1½	1½	2	2½	Yds.
Pants B	60**	1½	2½	2½	2½	2½	Yds.
Shorts C	60**	1	1	1½	1½	1½	Yds.
Robe D	45**	5	5½	5½	5½	5½	Yds.
	60**	4	4½	4½	4½	4½	"
Interfacing	20" - 3½ yds.						

FINISHED GARMENT MEASUREMENTS (Includes Design and Wearing Ease)

A Chest	44½	48½	52½	56½	60½	Ins.
D Chest	46	50	54	58	62	"
A Waist	43½	44½	53½	57½	61½	"
D Waist	46	50	54	58	62	"
B,C Hip	39½	43½	47½	51½	55½	"
Width, lower edge						
Tank Top A	46½	50½	54½	58½	62½	Ins.
Robe D	46	50	54	58	62	"
Width, each leg						
Pants B	24½	26½	29	31½	33½	Ins.
Shorts C	22½	24½	27½	30½	33	"
Finished back length from base of neck						
Tank Top A	30½	31	31½	32	32½	Ins.
Robe D	52½	53	53½	54	54½	"
Finished side length from waist						
Pants B	42	42½	43	43½	44	Ins.
Shorts C	16	16½	17	17½	18	"

*with nap **without nap

ROBE DE CHAMBRE, DÉBARDEUR EN TRICOT, PANTALON ET SHORT POUR HOMMES

Tissus Conseillés: Tricots extensibles seulement tels que Tricot de coton, Jersey, Tricot doubles léger, Tissu sweat-shirt, Tricots gaufre. Reportez-vous à la règle Pick-A-Knit®. **D** aussi en: Chambray, Flanelle, Popeline. **Entoilage D:** Thermocollant léger.

Mercerie: C,D: 1.3m d'élastique de 4cm.

Tailles	P/S (34-36)	M/M (38-40)	G/L (42-44)	TG/XL (46-48)	TTG/XXL (50-52)
Fr/Eur	44-46	48-50	52-54	56-58	60-62

MESURES DU CORPS: Choisissez la taille du patron basée sur les mesures du corps

	P/S	M/M	G/L	TG/XL	TTG/XXL	cm
Poitrine	87-92	97-102	107-112	117-122	127-132	"
Taille	71-76	81-87	92-99	107-112	117-122	"
Hanches	89-94	99-104	109-115	119-124	128-135	"

Débardeur A	150cm*	1.0	1.0	1.0	1.8	1.9	m
Pantalon B	150cm*	1.6	2.2	2.4	2.5	2.6	m
Short C	150cm*	0.9	0.9	1.0	1.1	1.3	m
Robe de chambre D	115cm*	4.6	4.7	4.8	4.8	5.0	m
	150cm*	3.7	3.7	3.8	3.9	3.9	"
Entoilage	51cm - 3.1m						

MESURES DES VÊTEMENTS FINI (Motif et aisance de port compris)

A Poitrine	113	123	133	144	154	cm
D Poitrine	117	127	137	147	157	"
A Taille	116	126	136	146	156	"
D Taille	117	127	137	147	157	"
B,C Hanches	100	110	121	131	141	"
Largeur à l'ourlet						
Débardeur A	118	128	138	149	159	cm
Robe de chambre D	117	127	137	147	157	"
Largeur, chaque jambe						
Pantalon B	62	68	74	79	85	cm
Short C	57	63	70	77	84	"
Longueur finie - dos, votre nuque à l'ourlet						
Débardeur A	77	79	80	81	83	cm
Robe de chambre D	133	135	136	137	138	"
Longueur finie - côté, taille à l'ourlet						
Pantalon B	107	108	109	110	112	cm
Short C	41	42	43	44	46	"

*avec sens **sans sens



A



B



C



D

PICK-A-KNIT® RULE

**FOR THIS PATTERN - 4" (10 cm) OF KNIT FABRIC MUST STRETCH CROSSWISE FROM HERE
POUR CE PATRON - LE JERSEY DOIT S'ETIRER DANS LA LARGEUR DE 4" (10 cm) DEPUIS ICI
PARA ESTE PATRON - LAS MALLAS DEBEN ESTIRARSE A LO ANCHO POR 4" (10 cm) DESDE AQUI**



**TO HERE 50%
JUSQUE LA 50%
HASTA ALLA 50%**



Use the 1 inch (2.54cm) box to ensure you are using rule at 100%

Utilisez la boîte de 2.54 cm pour vous assurer d'utiliser la règle à 100%.

Utilizar un cuadrado de 2.54 cm para asegurarse de estar usando la regla al 100%.



When using the Pick-A-Knit® rule to measure your fabrics stretch capacity, rule must be viewed or printed at 100%.

Quand vous utilisez la règle Pick-A-Knit® pour mesurer la capacité d'élasticité des tissus, la règle doit être visible ou imprimée à 100%.


Al utilizar la regla Pick-A-Knit® para medir la capacidad de elasticidad de las telas, la regla debe estar visible o impresa al 100%.

Simplicity

Thank you for purchasing this Simplicity pattern. We made every effort to provide you with a high quality product.

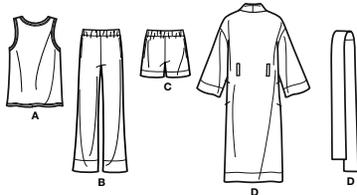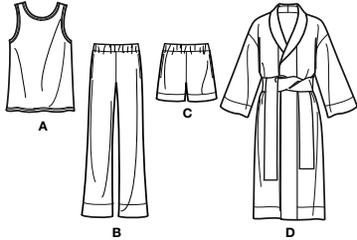

18 PIECES

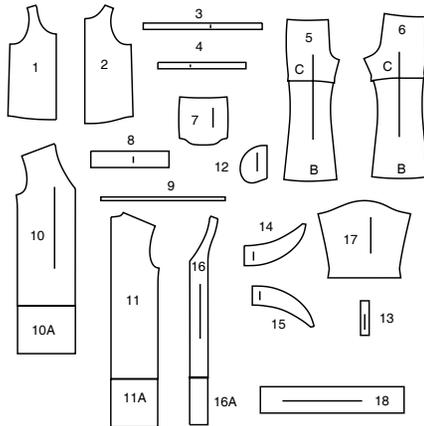

- 1 FRONT - A
- 2 BACK - A
- 3 NECK BANDING - A
- 4 ARMHOLE BANDING - A
- 5 FRONT - B,C
- 6 BACK - B,C
- 7 POCKET - B,C
- 8 CASING - B,C
- 9 ELASTIC GUIDE FOR WAIST - B,C
- 10(10A) FRONT - D
- 11(11A) BACK - D
- 12 POCKET - D
- 13 CARRIER - D
- 14 UPPER COLLAR - D
- 15 UNDER COLLAR - D
- 16(16A) FRONT FACING - D
- 17 SLEEVE - D
- 18 BELT - D

General Directions

The Pattern

- SYMBOLS**
- GRAIN LINE: Place on straight grain of fabric parallel to selvage
 - PLACE SOLID LINE on fold of fabric.
 - CENTER FRONT OR BACK of garment.
 - NOTCHES
 - DOTS
 - CUTTING LINE
 - LENGTHEN OR SHORTEN LINES

SEAM ALLOWANCE: 5/8" (1.5cm) unless otherwise stated is included but not printed on MULTI-SIZE PATTERNS. Mark your size with colored felt tip pen. See chart on tissue for how to use MULTI-SIZE PATTERNS.

ADJUST IF NEEDED

Make adjustments before placing pattern on fabric.

TO LENGTHEN: Cut pattern between lengthen or shorten lines. Spread pattern evenly, the amount needed and tape to paper.

TO SHORTEN: At lengthen or shorten lines, make an even pleat taking up amount needed. Tape in place.

When lengthen or shorten lines are not given, make adjustments at lower edge of pattern.

Cutting/Marking

BEFORE CUTTING: PRESS pattern pieces with a warm dry iron. PRE-SHRINK fabric by pre-washing washables or steam-pressing non-washables.

CIRCLE your cutting layout.


PIN pattern to fabric as shown in Cutting Layouts.

- FOR DOUBLE THICKNESS: Fold fabric with RIGHT sides together.
- FOR SINGLE THICKNESS: Place fabric RIGHT side up.
- FOR PILE, SHADED OR ONE WAY DESIGN FABRICS: Use "with nap" layouts

AFTER CUTTING: Transfer markings to WRONG side of fabric before removing pattern. Use pin and chalk method or dressmaker's tracing paper and wheel.


To Quick Mark:

- Snip edge of fabric to mark notches, ends of fold lines and center lines.
- Pin mark dots.



Sewing


- SEW garment following Sewing Directions.
- PIN or machine-baste seams matching notches.
- STITCH 5/8" (1.5 cm) seams unless otherwise stated.
- PRESS seams open unless otherwise indicated clipping when necessary so seams will lie flat.
- TRIM seams to reduce bulk, as shown below.

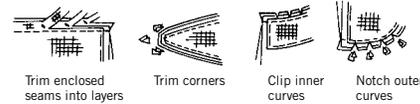

SPECIAL CUTTING NOTES

- If layout shows a piece extending past fold, cut out all pieces except piece that extends. Open out fabric to single thickness. Cut extending piece on RIGHT side of fabric in position shown.
- Mark small arrows along both selvages indicating direction of nap or design. Fold fabric crosswise with RIGHT sides together, and cut along fold (a). Turn one fabric layer around so arrows on both layers go in the same direction. Place RIGHT sides together (b).

Cutting Layouts




POSITION OF PATTERN PIECES MAY VARY SLIGHTLY ACCORDING TO YOUR PATTERN SIZE


TANK TOP A

USE PIECES 1 2 3 4

60" (150CM) WITH NAP SIZES S M L

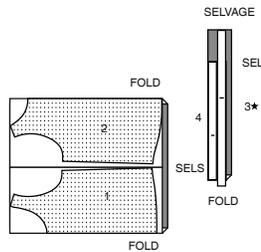


60" (150CM) WITH NAP SIZES XL XXL

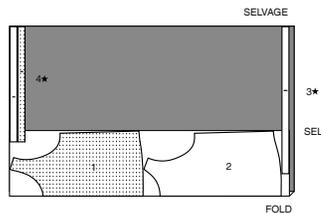


PANTS B

USE PIECES 5 6 7 8

60" (150CM) WITH NAP SIZES S M L XL

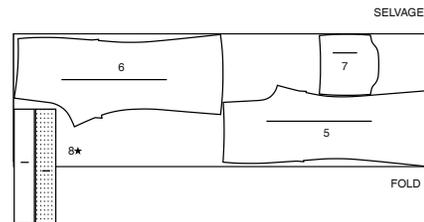


60" (150CM) WITH NAP SIZES XXL

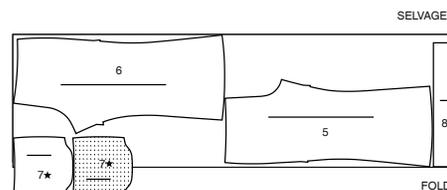


SHORTS C

USE PIECES 5 6 7 8

60" (150CM) WITH NAP SIZES S M L XL

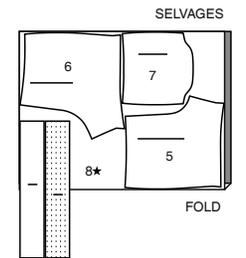

60" (150CM) WITH NAP SIZES XXL

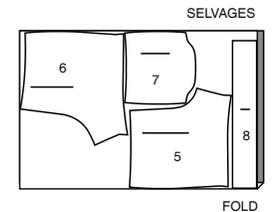

CUTTING LAYOUTS CONTINUED ON PAGE 2

S9931


2 of 4

ROBE D


USE PIECES 10 (10A) 11 (11A) 12 13 14 15 16 (16A) 17 18

D NOTE: BEFORE CUTTING FABRIC JOIN PIECE IN PARENTHESIS TO CORRESPONDING PIECES FOLLOWING INSTRUCTIONS ON TISSUE PATTERN.

45" (115CM)
WITH NAP
ALL SIZES

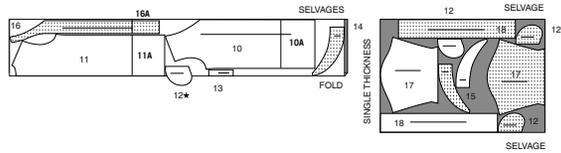


60" (150CM)
WITH NAP
ALL SIZES

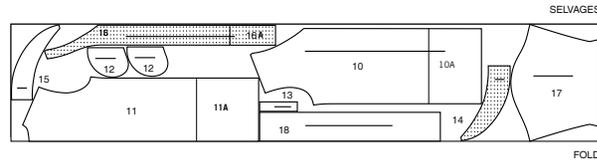

INTERFACING

USE PIECES 14 15 16 (16A)

20" (51CM)
ALL SIZES

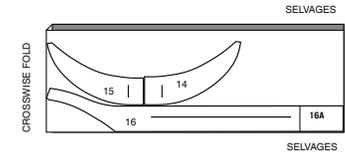

Sewing Directions



Read **General Directions** on page 1 before you begin.


Sewing terms appearing in **BOLD TYPE** in Sewing Instructions are explained below.

UNDERSTITCH - Open out facing or underside of garment; stitch to seam allowance close to seam.

FINISH - Stitch 1/4" (6mm) from raw edge and finish with one of the following: (1) Pink OR (2) Overcast OR (3) Turn in along stitching and stitch close to fold OR (4) Overlock.
OPTIONAL FOR HEMS: Apply Seam Binding.

PATTERN PIECES WILL BE IDENTIFIED BY NUMBERS THE FIRST TIME THEY ARE USED.
STITCH SEAMS WITH RIGHT SIDES TOGETHER UNLESS OTHERWISE STATED.

TANK A

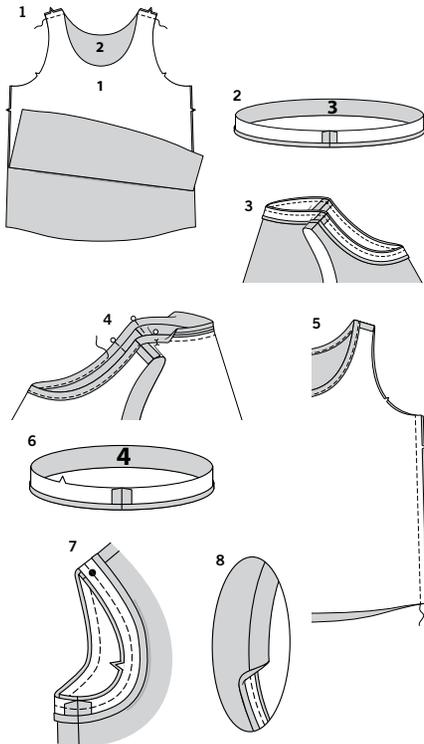

1. With **RIGHT** sides together, stitch front (1) to back (2) at shoulder seams.

2. Stitch ends of neck binding (3).
Press under 3/8" (1cm) on long unmarked edge.

3. With **RIGHT** sides together, pin binding to neck edge, matching centers and placing small dot at shoulder seams, matching remaining seams.
Stitch in 3/8" (1cm) seam, stretching binding to fit.


4. Press binding out, pressing seam toward binding.
Turn the pressed edge of the binding to **INSIDE** so that it encases the raw edge and just covers the stitching. Pin in place, placing pins on **OUTSIDE**.
On **OUTSIDE**, straight or Zig-Zag stitch binding close to seam, stretching binding to fit and catching in pressed edge on **INSIDE**.

5. Stitch front to back at side seams.

6. With **RIGHT** sides together, stitch ends of armhole binding (4).
Press under 3/8" (1cm) on unnotched edge.

7. With **RIGHT** sides together, pin binding to armhole edge, placing large dot at shoulder seam and matching remaining seams. Stitch. Trim seam.

8. Press, pressing binding out.

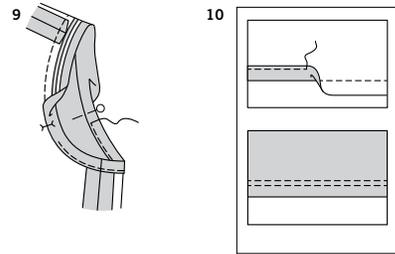



9. Turn binding to **INSIDE**; press. Baste close to inner pressed edge. On **OUTSIDE**, top-stitch as basted.

10. Press up hem along lower edge of garment.
Stitch 1/4"(6mm) from raw edge, and 1/8"(3mm) away. As shown.
OR
To form narrow hem, tuck under raw edge to meet crease. Press. Stitch hem in place.


PANTS B, SHORTS C

VIEW C - Will be illustrated unless otherwise indicated.


1. With **RIGHT** sides together, pin pocket (7) to front (5) matching notches and large dots. Stitch between large dots. Clip to large dots being careful not to clip through stitching.

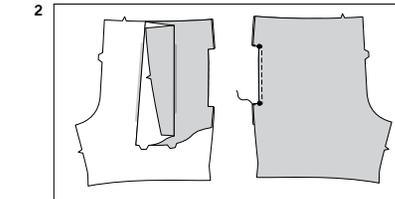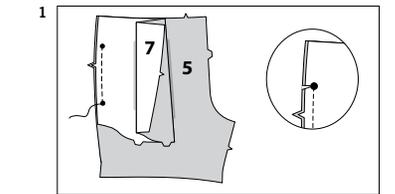

2. Turn pocket to **INSIDE**. Press. On **OUTSIDE**, top-stitch 1/4" (6mm) from finished edge, squaring stitching, to large dots.

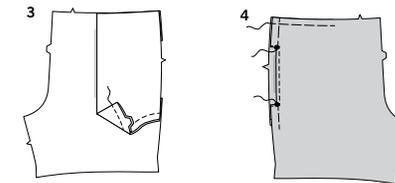









3. On **INSIDE**, with **RIGHT** sides together, fold pocket along fold line, having raw edges even. Stitch double notched edge, as shown.

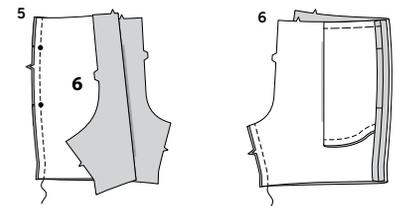

4. Baste raw edges of pocket together.

5. With **RIGHT** sides together, pin back (6) to front at sides, matching notches and large dots. Stitch.

6. Press pocket toward front. Pressing seam open. Baste raw edges together. Stitch front to back at inner leg seam.

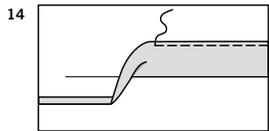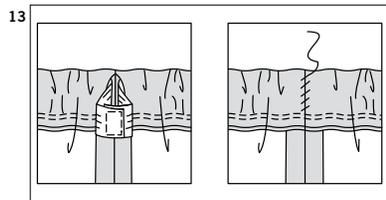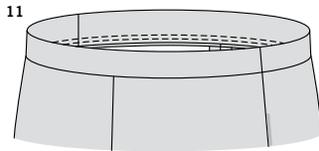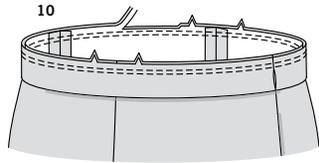

7. With RIGHT sides together, insert one leg INSIDE the other. Pin center seam, matching inner leg seams and notches. Stitch. To reinforce seam, stitch again over first stitching.

8. With RIGHT sides together, stitch center back seam of casing (8), leaving an opening between small dots, as shown. Back-stitch at small dots to reinforce seam.

9. Fold casing in half, lengthwise, with WRONG sides together, having raw edges even. Pin. The side with the opening is the underside of the casing.








10. With the underside of casing facing you, pin casing to garment matching centers and side seams. Stitch along seam line. Stitch again 1/4" (6mm) from first stitching within seam allowance. Trim close to second stitching.

11. Press seam toward garment, pressing casing out.

12. Cut a piece of elastic the length of elastic guide for waist (9). Insert elastic through opening in casing. Overlap ends and hold with a safety pin. Adjust if necessary.

13. Stitch ends of elastic together securely. Slip-stitch opening edges of casing together. Distribute fullness evenly. **TIP-** To secure elastic so it won't twist in wearing, stitch through all thicknesses of casing in the groove of each seam.

14. Press up hem on lower edge of shorts/pants. Press under 1/4" (6mm) on raw edge. Stitch close to inner pressed edge.

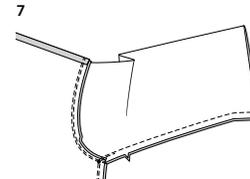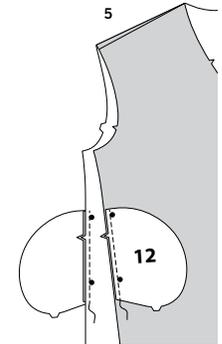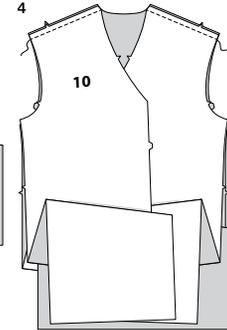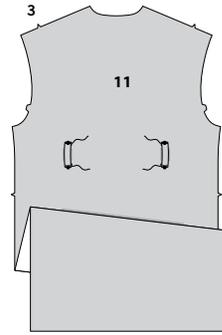

ROBE D

1. Fold carrier (13) in half lengthwise with RIGHT sides together. Stitch long edge in a 3/8" (1cm) seam.

2. Turn carrier RIGHT side out. Press. Bringing seam toward center.

3. Cut carrier in half forming two carriers. Turn under 1/4" (6mm) on each end of carrier. On OUTSIDE, pin carriers to back (11) centering pressed edges at large dots. Stitch close to pressed edges.


4. With RIGHT sides together, stitch front (10) sections to back at shoulder seams.

5. Stitch one pocket (12) sections to front and back at each side in 1/4" (6mm) seam. Press seams toward pockets.

6. With RIGHT sides together, pin sleeve (17) to armhole edge with center small dot at shoulder seam, matching notches and remaining small dots. Stitch. Stitch again 1/8" (3mm) from first stitching. Trim seam below notches close to stitching. Press seam toward sleeve.


7. Stitch front to back at entire side and underarm seams, leaving open between large dots. Stitch again along curve of under arm to reinforce seam. Stitch pocket edges together between side seams.

8. Clip back seam allowances above and below pockets. Turn pockets toward front along seamlines; press.

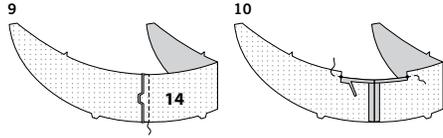


9. Apply interfacing to WRONG side of upper collar (14). Fuse in place following manufacturer's directions. Stitch center back seam.

10. Reinforce upper collar by stitching along seamline 1"(2.5cm) beyond small dots, using small machine stitches. Clip to small dots, being careful not to clip through stitching. Press under seam allowance between clips. Trim to 3/8"(1cm).




11. Stitch center back seam of under collar (15) sections.

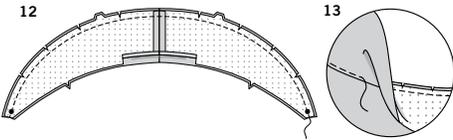


12. With RIGHT sides together, pin upper collar to under collar, easing upper collar to fit. Stitch outer double notched edge, leaving single notched edge open. Trim seam, clip curves.

13. UNDERSTITCH under collar, as far as possible.

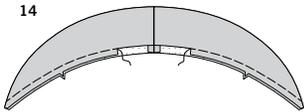


14. Turn collar RIGHT side out. Press. Baste raw edges together.

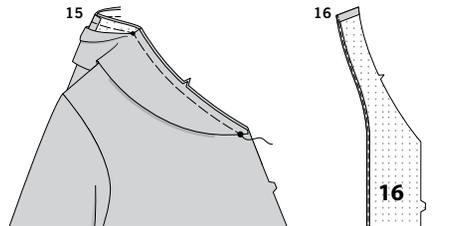


15. On OUTSIDE, pin collar to front and neck edge matching large dots and notches, placing small dots at shoulder seams. Baste, keeping pressed edge free.

16. Apply interfacing to WRONG side of front facing (16). Fuse in place following manufacturer's directions. Press under seam allowances on shoulder edges of facing. FINISH unnotched edge.

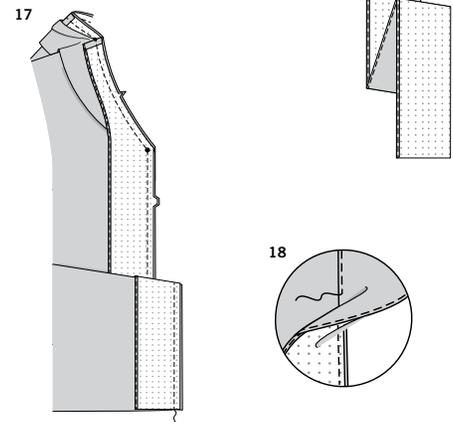


17. On OUTSIDE, pin facing to front and neck edge matching notches and large dots, placing small dots at shoulder seams. Baste. Stitch, pivoting at large dot, breaking stitching at inner small dot. Continue stitching seam, keeping pressed edge of upper collar free. Trim seam and corners.


18. UNDERSTITCH facing, as far as possible.

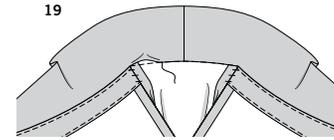


19. Slip-stitch pressed edge of collar over seam. Hand-tack facing to shoulder seams.



20. Turn lower edge of facing to OUTSIDE. Stitch across facing 2-1/2"(6.5cm) above lower edge. Trim facing close to stitching. Trim garment to within 5/8" (1.5cm) of inner edge of facing.




21. Turn facing to INSIDE; press, pressing up hem along marking. Press under 1/4" (6mm) on raw edge. Stitch hem in place starting and ending at finished edge of facing.

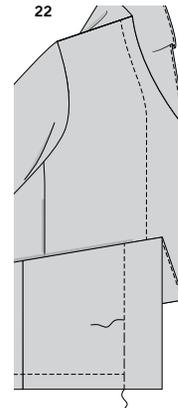


22. On INSIDE, baste 1/4"(6mm) away from inner finished edge of front facing. On OUTSIDE, top-stitch as basted.


BELT A



23. With RIGHT sides together, stitch center back seam of belt (18) sections.

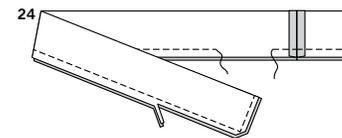

24. Fold belt in half lengthwise with RIGHT sides together. Stitch along outer edge, leaving an opening large enough for turning. Trim seam, and corners.



25. Turn belt RIGHT side out. Press. Slip-stitch opening closed.



Congrats!

You've completed your sewing adventure

**SHARE
YOUR** LOOK



Post your pattern and tag us
@simplicity_creative_group and **#simplicitypatterns**
for a chance to be featured on our social media.

Look for more PDF patterns at [simplicity.com](https://www.simplicity.com)

Have a question or need help with your sewing project call us at
1-888-588-2700



Simplicity ©2024 a division of IG Design Group Americas Inc. • Atlanta, GA 30342 USA www.thedesigngroup.com • All Rights Reserved. www.simplicity.com • Made in the U.S.A. Fabriqué aux États-Unis.

To be used for individual private home use only and not for commercial or manufacturing purposes. • A usage privé seulement et non à des fins commerciales ou de production en série. • Para uso privado solamente, no se puede utilizar con propósitos de comercialización o de producción en serie.