

S9946

miG A DIY & LIFESTYLE BRAND



Average

MISSES' DRESSES

Suggested Fabrics: Chambray, Cotton Blends, Cotton Lawns, Linen Blends, Poplin, Rayon, Silky Types. **Lining:** Cotton Blends, Polyester Blends. **Interfacing:** Lightweight Fusible.

Notions: A,B: ¾ yd. (0.4m) of ¼" (6mm) elastic. **Also for A:** One 12" (30cm) invisible zipper. **Also for B:** One 24" (60cm) invisible zipper.

Sizes	8	10	12	14	16	18	20	22	24	26
European	34	36	38	40	42	44	46	48	50	52

BODY MEASUREMENTS: Select pattern size based on body measurements

Bust	31½	32½	34	36	38	40	42	44	46	48	Ins.
Waist	24	25	26½	28	30	32	34	37	39	41½	"
Hip-9" below waist	33½	34½	36	38	40	42	44	46	48	50	"
Back-neck to waist	15¾	16	16¼	16½	16¾	17	17¼	17½	17¾	17¾	"

Dress A	45**	2%	2%	2%	2%	2%	2%	3	3	3%	3%	Yds.
	60**	2%	2%	2%	2%	2%	2%	2%	2%	2%	2%	"
Lining -	45***	-	¾	¾	¾	¾	¾	¾	¾	¾	¾	Yd.
Interfacing	20"	¾	¾	¾	¾	¾	¾	¾	¾	¾	¾	Yd.

Dress B	45**	5%	5%	5%	5%	5%	5%	5%	5½	5½	Yds.
	60**	3%	3%	3%	3%	3%	3%	3%	4	4%	"
Lining	45***	¾	¾	¾	¾	¾	¾	¾	¾	¾	Yd.
Interfacing -	20"	-	¾	¾	¾	¾	¾	¾	¾	¾	Yd.

FINISHED GARMENT MEASUREMENTS (Includes Design and Wearing Ease)

A,B Bust	36¾	37¾	39	41	43	45	47	49	51	53	Ins.
A,B Waist	26½	27½	29	31	33	35	37	39	41	43	"
Finished back length from base of neck											
Dress A	41¾	42	42¾	42¾	42¾	43	43¾	43¾	43¾	44	Ins.
Dress B	55%	56	56¾	56¾	56¾	57	57¾	57¾	57¾	58	"

*with nap **without nap

Moins Facile

ROBES POUR JEUNES FEMMES

Tissus Conseillés: Chambray, Cotonnades, Linon de coton, Toile de lin mélangés, Rayonne, Popeline, Tissus soyeux. **Doubleure:** Cotonnades, Mélanges de polyester.

Entoilage: Thermocollant léger.

Mercerie: A,B: 0.4m d'élastique de 2.5cm. **Aussi pour A:** 1 fermeture à glissière invisible de 30cm. **Aussi pour B:** 1 fermeture à glissière invisible de 60cm.

Tailles	8	10	12	14	16	18	20	22	24	26
Françaises	36	38	40	42	44	46	48	50	52	54
Européen	34	36	38	40	42	44	46	48	50	52

MESURES DU CORPS: Choisissez la taille du patron basée sur les mesures du corps

Poitrine	80	83	87	92	97	102	107	112	117	122	cm
Taille	61	64	67	71	76	81	87	94	99	106	"

Hanches (23cm au-dessous de la taille)

	85	88	92	97	102	107	112	117	122	127	cm
Dos du cou à la taille	40	40.5	41.5	42	42.5	43	44	44	44.5	44.5	"

Robe A	115cm*	2.6	2.6	2.6	2.6	2.6	2.6	2.7	2.7	3.0	3.1	m
	150cm*	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	2.1	2.2	"
Doubleure -	115cm**	-0.6m										
Entoilage	51cm	0.5	0.5	0.5	0.5	0.5	0.5	0.6	0.6	0.6	0.6	m

Robe B	115cm*	4.8	4.8	4.8	4.8	4.9	4.9	4.9	4.9	5.1	m	
	150cm*	3.4	3.4	3.5	3.5	3.4	3.5	3.5	3.7	3.8	3.9	"
Doubleure	115cm**	0.7	0.7	0.7	0.7	0.8	0.8	0.8	0.8	0.8	0.8	"
Entoilage -	51cm	-0.3m										


MESURES DES VÊTEMENTS FINI (Motif et aisance de port compris)

A,B Poitrine	93	95	99	104	109	114	119	124	130	135	cm
A,B Taille	67	70	74	79	84	89	94	99	104	109	"
Longueur finie - dos, votre nuque à l'ourlet											
Robe A	106	107	107	108	109	109	110	110	111	112	cm
Robe B	142	142	143	144	144	145	145	146	147	147	"

*avec sens **sans sens




A

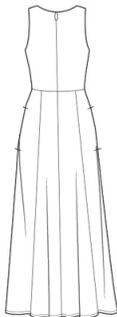

B

Simplicity®

Thank you for purchasing this Simplicity pattern. We made every effort to provide you with a high quality product.

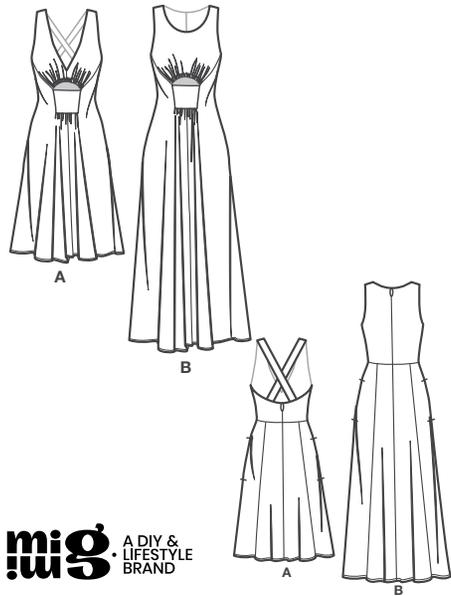

- 1 Bodice Front-A
- 2 Front Interfacing-A
- 3 Elastic Guide for Front-A,B
- 4 Front-A,B
- 5 Front Inset-A,B
- 6 Bodice Back-A
- 7 Back Strap-A
- 8 Skirt Back-A,B
- 9 Skirt Side Back-A,B
- 10 Pocket-A,B
- 11 Bodice Front-B
- 12 Bodice Back-B
- 13 Front Interfacing-B
- 14 Back Interfacing-B



General Directions

The Pattern

- SYMBOLS**
- ↔ GRAIN LINE Place on straight grain of fabric parallel to selvage
 - ⇄ PLACE SOLID LINE on fold of fabric.
 - CENTER FRONT OR BACK of garment.
 - ▽ NOTCHES
 - ○ DOTS
 - CUTTING LINE
 - == LENGTHEN OR SHORTEN LINES

SEAM ALLOWANCE: 5/8" (1.5cm) unless otherwise stated is included but not printed on MULTI-SIZE PATTERNS. Mark your size with colored felt tip pen. See chart on tissue for how to use MULTI-SIZE PATTERNS.

ADJUST IF NEEDED
Make adjustments before placing pattern on fabric.

TO LENGTHEN:
Cut pattern between lengthen or shorten lines. Spread pattern evenly, the amount needed and tape to paper.

TO SHORTEN:
At lengthen or shorten lines, make an even pleat taking up amount needed. Tape in place.

When lengthen or shorten lines are not given, make adjustments at lower edge of pattern.

Cutting/Marking

BEFORE CUTTING:
PRESS pattern pieces with a warm dry iron. PRE-SHRINK fabric by pre-washing washables or steam-pressing non-washables.

CIRCLE your cutting layout.

PIN pattern to fabric as shown in Cutting Layouts.

• FOR DOUBLE THICKNESS: Fold fabric with RIGHT sides together.


• FOR SINGLE THICKNESS: Place fabric RIGHT side up.

• FOR PILE, SHADED OR ONE WAY DESIGN FABRICS: Use "with nap" layouts

AFTER CUTTING:
Transfer markings to WRONG side of fabric before removing pattern. Use pin and chalk method or dressmaker's tracing paper and wheel.


To Quick Mark:

- Snip edge of fabric to mark notches, ends of fold lines and center lines.
- Pin mark dots.




Sewing

- SEW garment following Sewing Directions.
- PIN or machine-baste seams matching notches.
- STITCH 5/8" (1.5 cm) seams unless otherwise stated.
- PRESS seams open unless otherwise indicated clipping when necessary so seams will lie flat.
- TRIM seams to reduce bulk, as shown below.

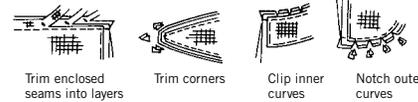


SPECIAL CUTTING NOTES


★ If layout shows a piece extending past fold, cut out all pieces except piece that extends.




Open out fabric to single thickness. Cut extending piece on RIGHT side of fabric in position shown.




✱ Mark small arrows along both selvages indicating direction of nap or design. Fold fabric crosswise with RIGHT sides together, and cut along fold (a).



Turn one fabric layer around so arrows on both layers go in the same direction. Place RIGHT sides together (b).



Cutting Layouts




POSITION OF PATTERN PIECES MAY VARY SLIGHTLY ACCORDING TO YOUR PATTERN SIZE


DRESS A

USE PIECES 1 4 5 6 7 8 9 10

45" (115CM) WITH NAP ALL SIZES

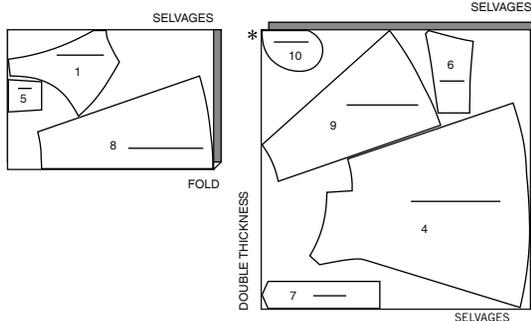


60" (150CM) WITH NAP ALL SIZES

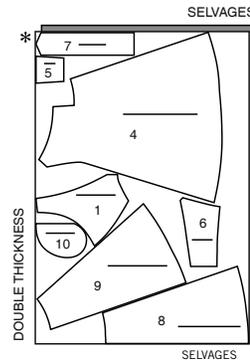

LINING A

USE PIECES 1 6 10


45" (115CM) WITHOUT NAP ALL SIZES



INTERFACING A

USE PIECE 2



20" (51CM) ALL SIZES

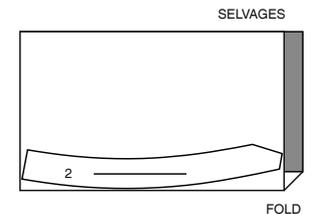

DRESS B

USE PIECES 4 5 8 9 10 11 12



45" (115CM) WITH NAP ALL SIZES

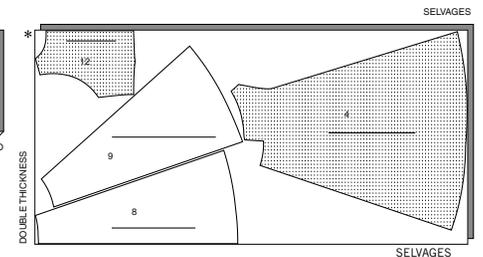

CUTTING LAYOUTS CONTINUED ON PAGE 2


S9946

2 of 4

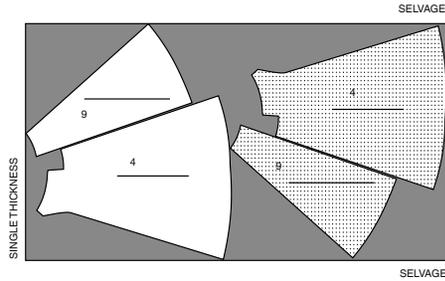60" (150CM)
WITH NAP
ALL SIZES


LINING B

USE PIECES 10 11 12

45" (115CM)
WITHOUT NAP
ALL SIZES

INTERFACING B

USE PIECES 13 14

20" (51CM)
ALL SIZES

Sewing Directions

Read **General Directions** on page 1 before you begin.Sewing terms appearing in **BOLD TYPE** in Sewing Instructions are explained below:

DART - To make darts in garment, with **RIGHT** sides together, fold the fabric through the center of the dart, bringing broken lines and small dots together. On **INSIDE**, place pins at **RIGHT** angles to the broken lines. Stitch the dart from wide end to point.

TIP - To prevent a "bubble" at the point, make the last few stitches right on the fold and leave the thread ends long enough to tie a knot. **DO NOT** back-stitch at the point. Press the dart flat along the stitching to "blend" the stitches, then press dart the direction indicated in sewing directions.

GATHER - Stitch along seamline and again 1/4" (6mm) away in seam allowance, using long machine stitches. Pull thread ends when adjusting to fit.

REINFORCE - Stitch along seamline where indicated in sewing instructions, using small machine stitches.

SLIPSTITCH - Slide needle through a folded edge, then pick up a thread of underneath fabric.

STAYSTITCH - Stitch 1/8" (3mm) from seamline in seam allowance (usually 1/2" (13mm) from raw edge) in direction of arrows.

TOPSTITCH - On outside, stitch 1/4" (6mm) from edge, seam or previous stitching, using presser foot as guide, or stitch where indicated in instructions.

UNDERSTITCH - Open out facing or underside of garment; stitch to seam allowance close to seam.

FINISH - Stitch 1/4" (6mm) from raw edge and finish with one of the following: (1) Pink OR (2) Overcast OR (3) Turn in along stitching and stitch close to fold OR (4) Overlock.



OPTIONAL FOR HEMS: Apply Seam Binding.

DRESS A, B

NOTE: View A will be shown unless otherwise indicated.

BODICE FRONT A

- Construct each half of front bodice as follows:
On **INSIDE**, fuse front interfacing (2) to bodice front (1) fabric section, following manufacturer's directions.
- Fold back strap (7) in half lengthwise with **RIGHT** sides together. Stitch outer edge, leaving ends with small and large dots open. Trim seam.
- Turn strap **RIGHT** side out. Press. Baste raw edges together.

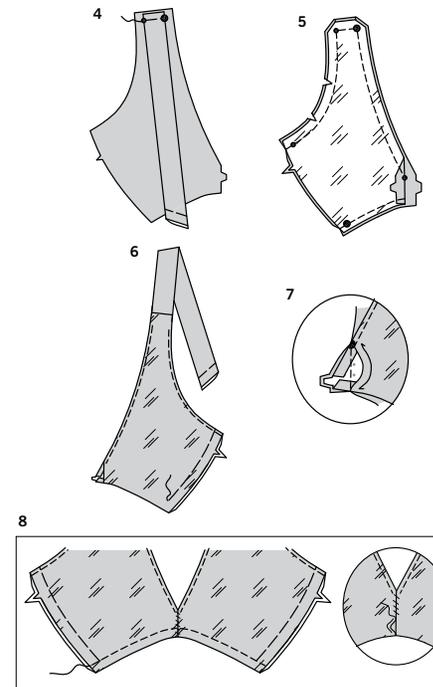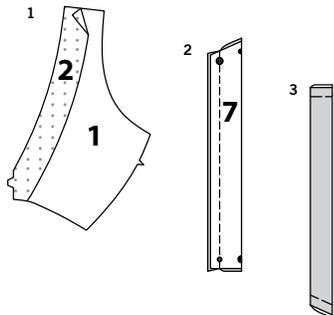

- On **OUTSIDE**, pin strap to bodice front matching small and large dots. Baste.
- Press under center front seam allowance on front edges of bodice front lining sections.
With **RIGHT** sides together, pin bodice lining to bodice having raw edges even, matching large dots. Stitch outer edges leaving center front and side seams open, stitching lower edge in a 3/8" (1cm) seam. Trim seam. Clip curves.

- UNDERSTITCH** bodice lining as far as possible. Do not under-stitch lower edge.
Turn lining to **INSIDE**, pressing straps out. Baste side edges together, stopping 5/8" (1.5cm) above lower edge.

- Pin front sections together matching large dots and notches. With **RIGHT** sides together, stitch center front seam, keeping pressed edge of lining free. Trim seam.
Tip: Hand-baste seam allowances to keep flat while inserting elastic.

- Slip seam allowances inside lining.
SLIPSTITCH pressed edges of lining together.
TOPSTITCH lower edge of bodice 1/2" (1.3cm) above finished edge, forming casing for elastic.


- Cut a piece of elastic the length of elastic guide for front (3). Insert elastic through openings in casing, having ends of elastic extend 5/8" (1.5cm) beyond side edges of casing. Stitch ends of elastic along seam line. Trim ends of elastic close to stitching.

BODICE FRONT B

- On **INSIDE**, fuse front interfacing (13) to bodice front (11), following manufacturer's directions.

S9946


3 of 4




- 11.** Press under seam allowances on shoulder edges of bodice front lining section.
With RIGHT sides together, pin lining to bodice having raw edges even.
Stitch outer edge leaving shoulder and side seams open, stitching lower edge in a 3/8" (1cm) seam. Trim seam. Clip curves.



- 12.** UNDERSTITCH lining as far as possible.
Turn lining to INSIDE press. Baste side edges together, stopping 5/8" (1.5cm) above lower edge.
TOPSTITCH lower edge of bodice 1/2" (1.3cm) above finished edge, forming casing for elastic.


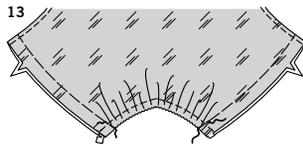


- 13.** Cut a piece of elastic the length of elastic guide for front (3).
Insert elastic through openings in casing, having ends of elastic extend 5/8" (1.5cm) beyond side edges of casing. Stitch ends of elastic along seam line. Trim ends of elastic close to stitching.


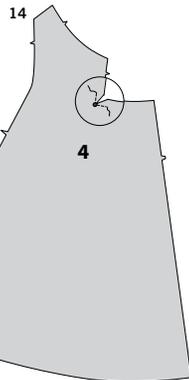


CONTINUE AS FOLLOWS FOR BOTH VIEWS

- 14.** REINFORCE front (4) sections at inner small dot. Clip to small dot being careful not to clip through stitching.

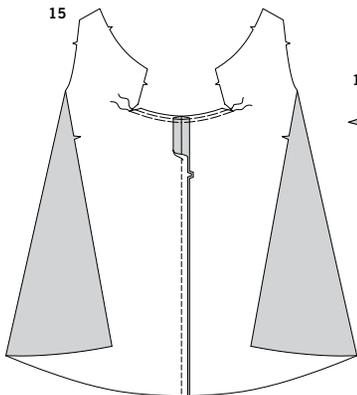


- 15.** With RIGHT sides together, stitch center front seam of front sections. Press seam open.
GATHER front between clips.
- 16.** With RIGHT sides together, pin front inset (5) sections together. Stitch upper edge, with large dots. Trim seam.





- 17.** UNDERSTITCH inset facing.
Turn inset facing to INSIDE. Press. Baste raw edges together.

- 18.** With RIGHT sides together, pin inset to center of skirt matching notches and dots. Adjust gathers. Baste. Stitch, pivoting with needle in fabric at small dots. Press seams away from inset.





- 19.** With RIGHT sides together, pin bodice front to upper edge of skirt, matching notches, large and small dots. Stitch between dots. Press seam down.

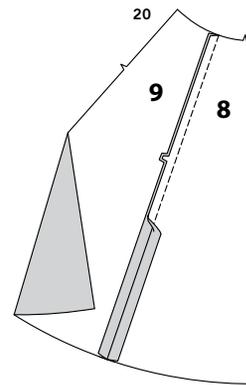

- 20.** With RIGHT sides together, stitch skirt back (8) to skirt side back (9) sections matching notches.

- 21.** VIEW B- On INSIDE, fuse back interfacing (14) to bodice back (12), following manufacturer's directions.
Stitch DART in bodice back.

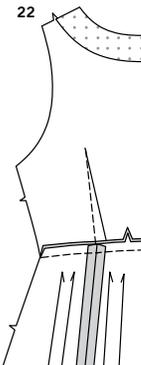


- 22.** With RIGHT sides together, stitch bodice back to upper edge of skirt, matching notches. Press seam up.

- 23.** VIEW A- With RIGHT sides together, stitch bodice back (6) to upper edge of skirt, matching notches. Press seam up.

ZIPPER


NOTE: Sew invisible zipper using an invisible zipper foot. Zipper may be longer than the zipper opening and will be adjusted after the zipper is inserted.

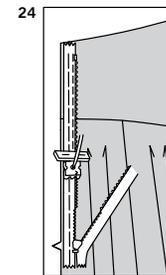

- 24.** Open the zipper and press the tape flat.
On OUTSIDE, pin RIGHT side of the zipper face down on the RIGHT side of the zipper opening. Have the coil along the seam line, the tape within the seam allowance and the top stop 3/4" (2cm) below upper edge, as shown. Hand-baste along center of tape. Position right groove of zipper foot over coil. Stitch along tape to notch. Back-stitch to reinforce.

S9946


4 of 4



25


- 25.** Pin the remaining half of the zipper to the LEFT side of the zipper opening in same manner. Hand-baste along the center of tape. Position zipper foot at the top of the zipper with LEFT groove over the coil. Stitch along tape to the notch. Back-stitch to reinforce.

26

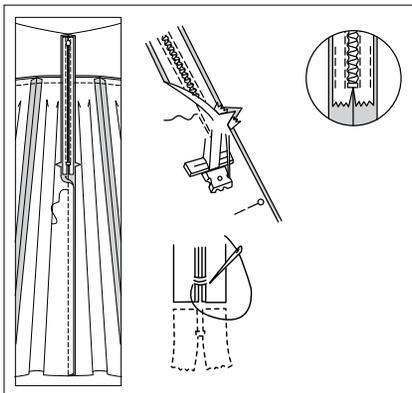


- 26.** Close zipper and check that it is invisible from the OUTSIDE. Pull the free ends of the zipper tape away from the seam allowance. Pin remaining center back seam together below zipper. Position zipper foot all the way to the LEFT so the needle goes down through the outer notch of the foot. Start stitching seam 1/4" (6mm) above the lowest stitch and slightly to the LEFT. Stitch remainder of seam. If the zipper is longer than the opening, using a strong thread, hand sew a few small stitches across ends of coil at end of opening. Trim away lower end of zipper to within 5/8" (1.5cm) of hand stitches. If you prefer, open out each seam allowance at end of zipper and stitch tape to seam allowance.

27

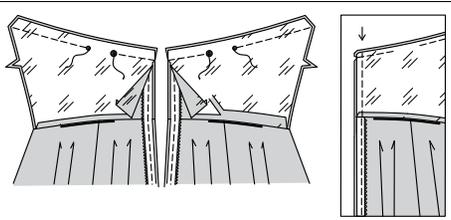**BACK LINING A**

- 27.** Press under seam allowance on lower edges of lining. Trim. Open out center back side opening edges of dress, rolling the zipper teeth away from the opening edge. With RIGHT sides together, pin bodice back lining to back, matching centers and side seams. Stitch upper edges leaving open between large and small dots. Trim seam; clip curves. Pin back opening edges together. Using an adjustable zipper foot, stitch 1/2" (1.3cm) from back edges, keeping zipper teeth free. Trim corners. Do not trim center back edges.

28

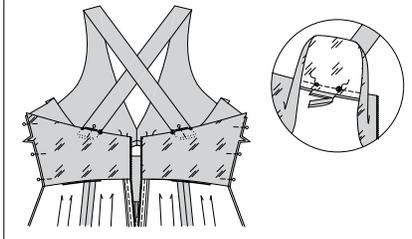


- 28.** Turn lining and back edges to INSIDE, rolling zipper teeth back in place; press. Insert remaining ends of straps through openings in back, matching large and small dots, crossing straps as shown. Pin in place. Pin side seams together temporarily. Try on and adjust straps to fit if necessary. Open out back lining. Stitch openings in upper back. Trim away excess strap.

- 29.** UNDERSTITCH lining as far as possible. Turn down lining. Baste raw edges together. SLIPSTITCH lower edge of lining to waist seam.

BACK LINING AND SHOULDER SEAMS B


- 30.** Stitch DART in bodice lining same as for bodice. Press under seam allowance on lower and shoulder edges of lining. Trim.

31

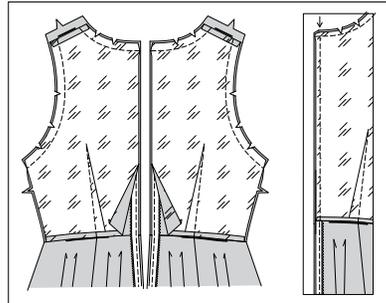


- 31.** Open out center back side opening edges of dress, rolling the zipper teeth away from the opening edge. With RIGHT sides together, pin bodice back lining to back, matching centers and side seams. Stitch neck and armhole edges. Trim seam; clip curves. Pin back opening edges together. Using an adjustable zipper foot, stitch 1/2" (1.3cm) from back edges, keeping zipper teeth free. Trim corners. Do not trim center back edges.

32

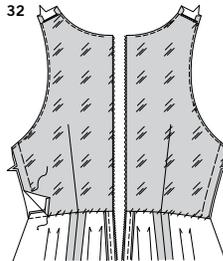

33




- 32.** Understitch lining as far as possible. Turn lining and back edges to INSIDE, rolling zipper teeth back in place; press. Baste raw edges together. SLIPSTITCH lower edge of lining to waist seam.


- 33.** Stitch front to back at shoulder seams, keeping pressed edge of lining free.

- 34.** Pin pressed edges of shoulder lining together. SLIPSTITCH in place.

34


**CONTINUE AS FOLLOWS FOR BOTH VIEWS**

35

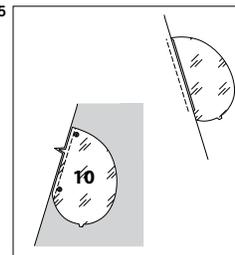


- 35.** Stitch one POCKET (10) lining section to front at each side in a 1/4" (6mm) seam. Press seams toward pockets. Stitch one pocket fabric section to back at each side in a 1/4" (6mm) seam. Press seams toward pockets.

36

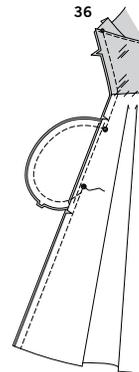

37

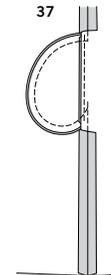


- 36.** Pin front and back together at sides, matching small dots at upper edge. Stitch side seam leaving opening between large dots. Stitch pocket edges together to side seams. Clip back seam allowances above and below pockets.


- 37.** Turn pockets toward front along seamlines; press.

- 38.** Press under 1/4" (6mm) on raw edge of front armhole, between small dots. Press seam allowance to INSIDE. Slipstitch in place.

38



39



- 39.** To make narrow hem, press under 1/4" (6mm) on lower edge. Stitch close to pressed edge. Trim close to stitching. Press under another 1/8" (3mm) and stitch in place.



Congrats!

You've completed your sewing adventure

**SHARE
YOUR** LOOK



Post your pattern and tag us
@simplicity_creative_group and **#simplicitypatterns**
for a chance to be featured on our social media.

Look for more PDF patterns at [simplicity.com](https://www.simplicity.com)

Have a question or need help with your sewing project call us at
1-888-588-2700



Simplicity ©2024 a division of IG Design Group Americas Inc. • Atlanta, GA 30342 USA www.thedesigngroup.com • All Rights Reserved. www.simplicity.com • Made in the U.S.A. Fabriqué aux États-Unis.

To be used for individual private home use only and not for commercial or manufacturing purposes. • A usage privé seulement et non à des fins commerciales ou de production en série. • Para uso privado solamente, no se puede utilizar con propósitos de comercialización o de producción en serie.