

S9957

Simplicity®



A



B



C

Designed and
printed in USA.

Average

MISSES' AND WOMEN'S SHORTS AND PANTS

Suggested Fabrics: A,B,C, C Contrasts 1, 2: Cotton Blends, Denim, Linen Blends, Twill.
A,B also in: Chambray, Chino, Stretch Wovens. **Lining:** Cotton Blends, Polyester Blends.
Interfacing: Lightweight Fusible.

Notions: A,B,C: One 7" (18cm) zipper (adjust to fit), one ¾" (1.5cm) button (jeans button optional).

Sizes	10	12	14	16	18	20W	22W	24W	26W	28W
European	36	38	40	42	44	46	48	50	52	54

BODY MEASUREMENTS: Select pattern size based on body measurements

Bust	32½	34	36	38	40	42	44	46	48	50	Ins.
Waist	25	26½	28	30	32	35	37	39	41½	44	"
Hip-9" below waist	34½	36	38	40	42	44	46	48	50	52	"
Back-neck to waist	16	16¼	16½	16¾	17	17¼	17½	17¾	17¾	17¾	"

Lining A,B,C 45*** - ¾ yd.

Interfacing A,B,C 20" - 1¼ yds.

Shorts A	45**	1½	1½	1½	1½	1½	1½	1½	1½	1½	Ins.
	60**	1	1	1½	1½	1½	1½	1½	1½	1½	"

Pants B	45**	2½	2½	2½	2½	2½	2½	2½	2½	3	Ins.
	60**	1½	1½	1½	1½	2	2½	2½	2½	2½	"

Pants C	45**	¾	¾	¾	1	1	1	1	1	1	Ins.
	60**	¾	¾	¾	¾	1	1	1	1	1	"

Contrast 1 (Back Pocket, Waistband, Middle Right Front, Right Middle Back, Lower Left Front, Lower Left Back)

45**	1½	1½	1½	1½	1½	1½	1½	1½	1½	1½	Ins.
60**	1	1	1½	1½	1½	1½	1½	1½	1½	1½	"

Contrast 2 (Side Front and Pocket, Lower Right Front, Upper Left Front, Lower Right Back, Upper Left Back)

45**	1½	1½	1½	1½	1½	1½	1½	1½	1½	1½	Ins.
60**	¾	¾	¾	¾	¾	¾	¾	¾	¾	¾	"

NOTE: Please refer to the sewing instructions for **FINISHED GARMENT MEASUREMENTS**.

*with nap **without nap

Moins Facile

SHORT ET PANTALONS POUR JEUNES FEMMES ET FEMMES

Tissus Conseillés: A,B,C, C Contrastes 1, 2: Cotonnades, Denim, Toile de lin mélangés, Twill.
A,B aussi en: Chambray, Chino, Tissus tissés extensibles. **Doublure:** Cotonnades, Mélanges de polyester. **Entoilage:** Thermocollant léger.

Mercerie: A,B,C: 1 fermeture à glissière de 18cm (adaptez pour ajuster), 1 bouton de 1.5cm (bouton pour jean facultatif).

Tailles	10	12	14	16	18	20W	22W	24W	26W	28W
Françaises	38	40	42	44	46	48	50	52	54	56
Européen	36	38	40	42	44	46	48	50	52	54

MESURES DU CORPS: Choisissez la taille du patron basée sur les mesures du corps

Poitrine	83	87	92	97	102	107	112	117	122	127	cm
Taille	64	67	71	76	81	89	94	99	105	112	"
Hanches (23cm au-dessous de la taille)	88	92	97	102	107	112	117	122	127	132	cm

Dos du cou à la taille	40.5	41.5	42	42.5	43	44	44	44.5	45	45	"
------------------------	------	------	----	------	----	----	----	------	----	----	---

Doublure A,B,C 115cm** - 0.3m

Entoilage A,B,C 51cm - 1.1m

Short A	115cm*	1.0	1.1	1.3	1.4	1.4	1.5	1.5	1.6	1.6	m
	150cm*	0.9	0.9	1.0	1.0	1.0	1.0	1.1	1.1	1.1	"

Pantalons B	115cm*	1.9	1.9	2.1	2.1	2.1	2.1	2.2	2.6	2.8	m
	150cm*	1.5	1.5	1.7	1.7	1.7	1.9	1.9	2.1	2.1	"

Pantalons C	115cm*	0.8	0.8	0.8	0.9	0.9	0.9	0.9	0.9	0.9	m
	150cm*	0.7	0.7	0.7	0.7	0.7	0.8	0.9	0.9	0.9	"

Contraste 1 (Poche dos, Ceinture, Partie milieu devant droit, Partie milieu dos droit, Devant gauche inférieur, Dos gauche inférieur)

115cm*	1.1	1.1	1.1	1.1	1.1	1.1	1.3	1.3	1.3	1.4	m
150cm*	1.0	1.0	1.1	1.1	1.1	1.0	1.1	1.1	1.1	1.1	"

Contraste 2 (Côté devant et poche, Devant droit inférieur, Devant gauche supérieur, Dos droit inférieur, Dos gauche supérieur)

115cm*	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	m
150cm*	0.6	0.6	0.7	0.8	0.8	0.8	0.8	0.9	0.9	0.9	"

NOTE: S'il vous plaît, reportez-vous au instructions de couture pour les **MESURES DU VÊTEMENTS FINI**.


*avec sens **sans sens



A



B




C

Simplicity®


Thank you for purchasing this Simplicity pattern.
We made every effort to provide you with a high quality product.



A




B




C



A




B



C


21 PIECES

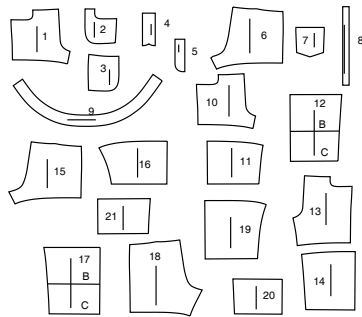

1 FRONT - A
2 POCKET FACING - A,B,C
3 SIDE FRONT AND POCKET - A,B,C
4 RIGHT FLY - A,B,C
5 LEFT FLY FACING - A,B,C
6 BACK - A
7 BACK POCKET - A,B,C
8 CARRIERS - A,B,C
9 WAISTBAND - A,B,C
10 UPPER RIGHT FRONT - B,C
11 MIDDLE RIGHT FRONT - B,C
12 LOWER RIGHT FRONT - B,C
13 UPPER LEFT FRONT - B,C
14 LEFT FRONT - B,C
15 UPPER RIGHT BACK - B,C
16 RIGHT MIDDLE BACK - B,C
17 LOWER RIGHT BACK - B,C
18 UPPER LEFT BACK - B,C
19 LEFT BACK - B,C
20 LOWER LEFT FRONT - C
21 LOWER LEFT BACK - C

Sizes	10	12	14	16	18	20W	22W	24W	26W	28W
European	36	38	40	42	44	45½	47½	49½	51½	53½
FINISHED GARMENT MEASUREMENTS (Includes Design and Wearing Ease)										
A,B,C Hip	36½	38	40	42	44	45½	47½	49½	51½	53½
Width, each leg										
Shorts A	22½	23	23½	24	24½	26½	28	29½	30	30½
Pants B	21	21½	22	22½	23	23½	24	24½	24½	-
Pants C	21	21½	22	22½	23	22	22½	23	23½	24
Finished side length from waist										
Shorts A (sit 1" below waist)	13	13¼	13½	13¾	14	14¼	14½	14¾	15	15¼
Pants B (sit 1" below waist)	30¼	31	31¼	31½	31¾	31¾	32	32¼	32½	32¾
Pants C (sit 1" below waist)	39	39¼	39½	39¾	40	40¼	40½	40¾	41	41¼

Cutting Layouts




POSITION OF PATTERN PIECES MAY VARY
SLIGHTLY ACCORDING TO YOUR PATTERN SIZE

LINING A,B,C

USE PIECE 2


45" (115CM)
WITHOUT NAP
ALL SIZES



INTERFACING A,B,C

USE PIECES 4 5 9


20" (51CM)
ALL SIZES

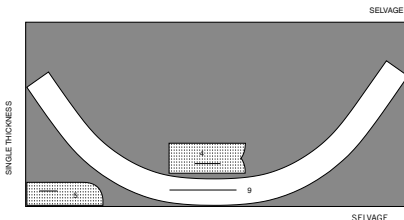


SHORT A

USE PIECES 1 3 4 5 6 7 8 9


45" (115CM)
WITH NAP
SIZES 10 12 14 16 18




45" (115CM)
WITH NAP
SIZES 20W 22W 24W 26W
28W

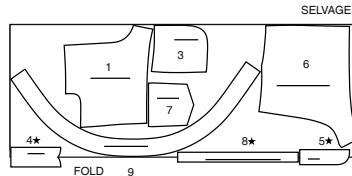

60" (150CM) WITH NAP
SIZES 10 12 14 16 18




60" (150CM) WITH NAP
SIZES 20W 22W 24W 26W 28W





PANTS B

PIECES 3 4 5 7 8 9 10 11 12 13
14 15 16 17 18 19

45" (115CM)
WITH NAP
SIZES 10 12 14 16 18




45" (115CM)
WITH NAP
SIZES 20W 22W



CUTTING LAYOUTS CONTINUED ON PAGE 2


General Directions

The Pattern



SEAM ALLOWANCE: 5/8" (1.5cm)
unless otherwise stated is included but not printed on MULTI-SIZE PATTERNS.
Mark your size with colored felt tip pen.
See chart on tissue for how to use MULTI-SIZE PATTERNS.

ADJUST IF NEEDED
Make adjustments before placing pattern on fabric.



When lengthen or shorten lines are not given, make adjustments at lower edge of pattern.

Cutting/Marking

BEFORE CUTTING:

PRESS pattern pieces with a warm dry iron. PRE-SHRINK fabric by pre-washing washables or steam-pressing non-washables.

CIRCLE your cutting layout.

PIN pattern to fabric as shown in Cutting Layouts.

• FOR DOUBLE THICKNESS: Fold fabric with RIGHT sides together.

• FOR SINGLE THICKNESS: Place fabric RIGHT side up.

• FOR PILE, SHADED OR ONE WAY DESIGN FABRICS: Use "with nap" layouts


AFTER CUTTING:

Transfer markings to WRONG side of fabric before removing pattern. Use pin and chalk method or dressmaker's tracing paper and wheel.

To Quick Mark:


• Snip edge of fabric to mark notches, ends of fold lines and center lines.

• Pin mark dots.



SPECIAL CUTTING NOTES


★ If layout shows a piece extending past fold, cut out all pieces except piece that extends.




Open out fabric to single thickness. Cut extending piece on RIGHT side of fabric in position shown.



✱ Mark small arrows along both selvages indicating direction of nap or design. Fold fabric crosswise with RIGHT sides together, and cut along fold (a).




Turn one fabric layer around so arrows on both layers go in the same direction. Place RIGHT sides together (b).




S9957

2 of 4


45" (115CM)
WITH NAP
SIZES 24W 26W 28W

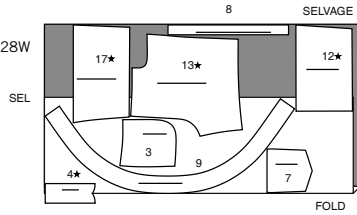

60" (150CM)
WITH NAP
SIZES 10 12 14 16 18

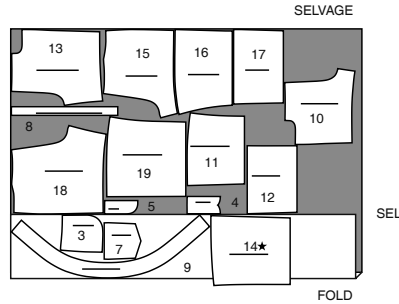


60" (150CM)
WITH NAP
SIZES 20W 22W 24W 26W 28W

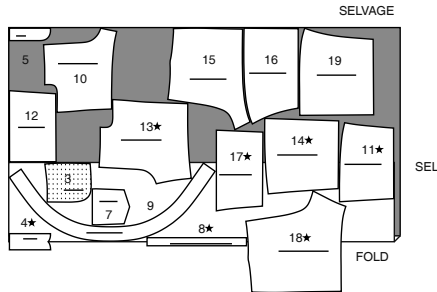

PANTS C

USE PIECES 3 4 5 8 10 14 15 19


45" (115CM)
WITH NAP
SIZES 10 12 14 16 18



45" (115CM)
WITH NAP
SIZES 20W 22W 24W 26W 28W



60" (150CM)
WITH NAP
SIZES 10 12 14 16 18




60" (150CM)
WITH NAP
SIZES 20W 22W 24W 26W 28W




CONTRAST 1 (BACK POCKET, WAISTBAND, MIDDLE RIGHT FRONT, RIGHT MIDDLE BACK, LOWER LEFT FRONT, LOWER LEFT BACK)
USE PIECES 7 9 11 16 20 21


45" (115CM)
WITH NAP
SIZES 10 12 14 16 18




45" (115CM) WITH NAP
SIZES 20W 22W 24W 26W 28W

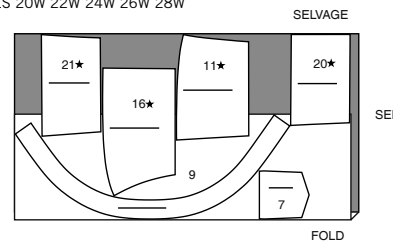

60" (150CM)
WITH NAP
SIZES 10 12 14 16 18




60" (150CM)
WITH NAP
SIZES 20W 22W 24W 26W 28W




CONTRAST 2 (SIDE FRONT AND POCKET, LOWER RIGHT FRONT, UPPER LEFT FRONT, LOWER RIGHT BACK, UPPER LEFT BACK)

USE PIECES 3 12 13 17 18


45" (115CM)
WITH NAP
SIZES 10 12 14 16 18




45" (115CM)
WITH NAP
SIZES 20W 22W 24W 26W 28W



60" (150CM) WITH NAP
SIZES 10 12 14 16 18



60" (150CM) WITH NAP
SIZES 20W 22W 24W 26W 28W



SEWING TUTORIALS



Build your skills viewing short, easy-to-follow videos at [simplicity.com/sewingtutorials](https://www.simplicity.com/sewingtutorials)

Sewing Directions

FABRIC KEY

Read **General Directions** on page 1 before you begin.

Sewing methods in **BOLD TYPE** have Sewing Tutorial Video available. Scan QR CODE to watch videos:

BELT LOOP/CARRIER – see Loops and Straps: “how to sew belt loops” video.

EDGE STITCH – see Machine Stitches: “how to sew an edgestitch” video.

FLAT DART – see Darts: “sewing flat dart” video.

FLY FRONT ZIPPER – see Zippers: “sewing a fly front zipper” video.

NARROW HEM – see Hems: “sewing narrow hems” video.

STITCH IN THE DITCH – see Machine Stitches: “how to stitch in the ditch” video.

TOPSTITCH – see Machine Stitches: “how to topstitch” video.

TRIM SEAM – see Seams: “how to trim, clip and layer seams” video.

UNDERSTITCH – see Machine Stitches: “how to understitch” video.

PATTERN PIECES WILL BE IDENTIFIED BY NUMBERS THE FIRST TIME THEY ARE USED.

STITCH 5/8" (1.5CM) SEAMS WITH RIGHT SIDES TOGETHER UNLESS OTHERWISE STATED.

Shorts and Pants sit 1" (2.5cm) below waist.

SHORTS A, PANTS B, C


1. Pin interfacing to **WRONG** side of **RIGHT FLY** (4), **LEFT FLY FACING** (5), and **WAISTBAND** (9). Fuse interfacing in place following manufacturer's directions.

FRONT AND BACK A

2. Machine stitch 5/8" (1cm) from lower edge of **FRONT** (1) and **BACK** (6) sections. To create self-fringe, machine-stitch again a generous 3/8" (1cm) from lower edge. Make short cuts every 2"–3" (5–7cm) from lower edge to second stitching. Fringe in small sections, using a straight pin or needle, pulling out clumps of thread.

PANT LEGS B

3. To make **RIGHT** front of pants, pin lower edge of **UPPER RIGHT FRONT** (10) to upper edge of **MIDDLE RIGHT FRONT** (11), matching notches. Stitch. Pin lower edge of middle right front to upper edge of **LOWER RIGHT FRONT** (12), matching notches. Stitch. Press seams toward waist.
4. On **OUTSIDE**, **EDGE STITCH** and **TOPSTITCH** pants above seams.
5. To make **LEFT** front of pants, pin lower edge of **UPPER LEFT FRONT** (13) to upper edge of **LEFT FRONT** (14), matching notches. Stitch. Press seam toward waist. On **OUTSIDE**, **EDGE STITCH** and **TOPSTITCH** pants above seams in the same manner as **RIGHT** front.

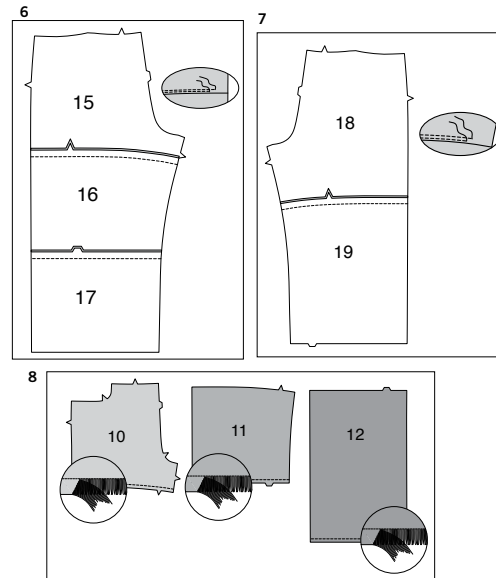

6. To make **RIGHT** back of pants, pin lower edge of **UPPER RIGHT BACK** (15) to upper edge of **RIGHT MIDDLE BACK** (16), matching notches. Stitch. Pin lower edge of middle right back to upper edge of **LOWER RIGHT BACK** (17), matching notches. Stitch. Press seams toward waist. On **OUTSIDE**, **EDGE STITCH** and **TOPSTITCH** pants above seams in the same manner as **RIGHT** front.

7. To make **LEFT** back of pants, pin lower edge of **UPPER LEFT BACK** (18) to upper edge of **LEFT BACK** (19), matching notches. Stitch. Press seam toward waist. On **OUTSIDE**, **EDGE STITCH** and **TOPSTITCH** pants above seams in the same manner as **RIGHT** front.

PANT LEGS C

8. To create self-fringe on lower edge of **UPPER RIGHT FRONT** (10), **MIDDLE RIGHT FRONT** (11), and **LOWER RIGHT FRONT** (12). Machine-stitch a generous 3/8" (1cm) from raw edge. Make short cuts every 2"–3" (5–7cm) from lower edge to stitching. Fringe in small sections, using a straight pin or needle, pulling out clumps of thread.

9. To make **RIGHT** front of pants, on **OUTSIDE**, lap fringed edge of upper right front over upper edge of middle right front, matching seamlines. Stitch across seamline. Lap fringed edge of middle right front over upper edge of lower right front, matching seamlines. Stitch across seamline.

10. To make **LEFT** front of pants, self-fringe lower edge of **UPPER LEFT FRONT** (13), **LEFT FRONT** (14), and **LOWER LEFT FRONT** (20), and in that order, lap each section over upper edge of the next, matching seamlines, and stitch in the same manner as **RIGHT** front of pants.

11. To make **RIGHT** back of pants, self-fringe lower edge of **UPPER RIGHT BACK** (15), **RIGHT MIDDLE BACK** (16), and **LOWER RIGHT BACK** (17), and in that order, lap each section over upper edge of the next, matching seamlines, and stitch in the same manner as **RIGHT** front of pants.

12. To make **LEFT** back of pants, self-fringe lower edge of **UPPER LEFT BACK** (18), **LEFT BACK** (19), and **LOWER LEFT BACK** (21), and in that order, lap each section over upper edge of the next, matching seamlines, and stitch in the same manner as **RIGHT** front of pants.

CONTINUE AS FOLLOWS FOR ALL VIEWS


NOTE: You may need to adjust the length of your zipper. This will be addressed in the instructions after installation.


13. To install a **FLY FRONT ZIPPER**, stitch front sections together at center front between large dot and notch.

14. Turn in **RIGHT** front opening edge along foldline; press.

15. Place closed zipper (face up) under **RIGHT** front opening edge, having pressed edge close to zipper teeth and zipper top stop 5/8" (1.5cm) below raw edge. Using a zipper foot, baste close to pressed edge.

16. With right sides together, fold **RIGHT FLY** (4) along foldline. Press. Baste raw edges together.

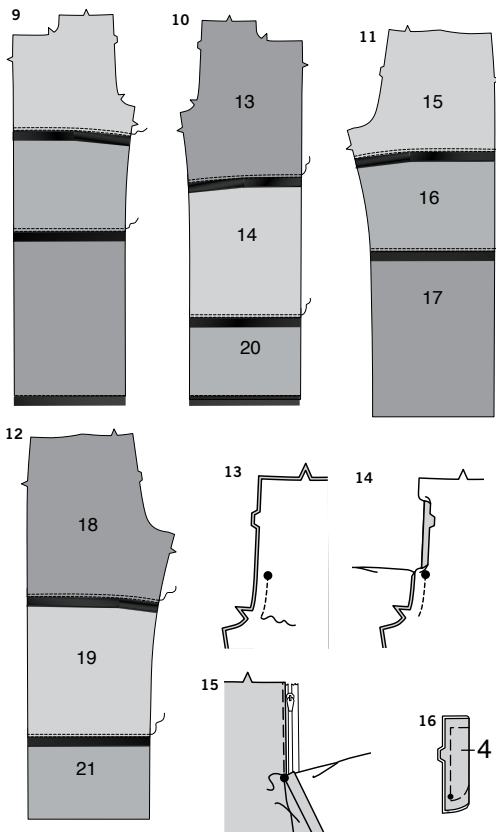

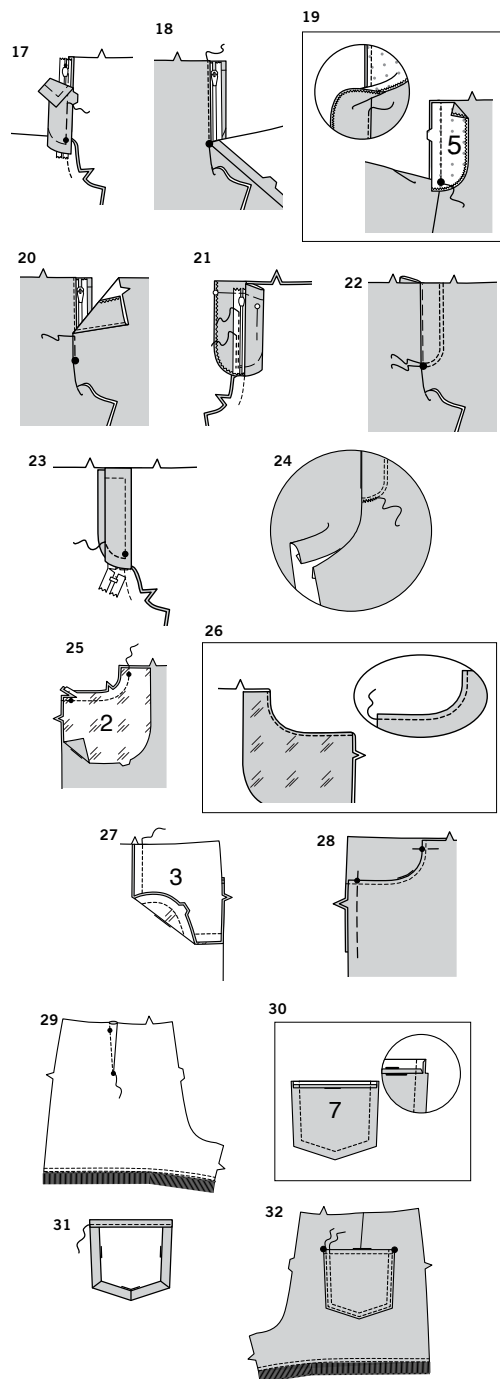

17. On **INSIDE**, pin right fly to **RIGHT** front opening edge (over zipper), matching notches and small dots, having raw edges even. Baste along previous basting for zipper.

18. On **OUTSIDE**, using a zipper foot, stitch close to pressed edge of front through all layers.

19. Finish outer edge of **LEFT FLY FACING** (5) with a zig zag stitch. Or by stitching along seamline, turning under along stitching, and stitching close to pressed edge. Pin fly facing to **LEFT** front opening edge, matching notches, and large dots. Stitch, ending at large dot. **TRIM SEAM. UNDERSTITCH** fly facing. Turn facing to **INSIDE**.

20. Lap **LEFT** front over **RIGHT**, matching centers. Baste close to edge through all thicknesses.

21. Pin right fly out of the way. Open out fly facing. Pin remaining zipper tape to fly facing, keeping **LEFT** front free. Using a zipper foot, stitch in place close to zipper teeth and along center of zipper tape.

22. Turn facing down. On **OUTSIDE**, stitch **LEFT** front along stitching line, and again 1/4" (6mm) **INSIDE** stitching, keeping right fly free.

23. Turn right fly back in place. On **INSIDE**, hand tack fly and facing together at lower edge, as shown. Trim away excess zipper tape even with lower edge of fly, if needed.

24. If desired, on **OUTSIDE**, machine-stitch a bar tack across lower end of fly through all thicknesses.

25. With **RIGHT** sides together and raw edges even, pin **POCKET FACING** (2) sections to front sections, matching small dots. Stitch single notched edge. **TRIM SEAM.**

26. **UNDERSTITCH** the facing. Turn facing to **INSIDE**; press. On **OUTSIDE**, **TOPSTITCH** close to finished edge.

27. On **INSIDE**, with **RIGHT** sides together, pin **SIDE FRONT AND POCKET** (3) sections to pocket facing, having raw edges even. Stitch double notched edge, as shown.


28. On **OUTSIDE**, lap front over side front and pocket section, matching small dots, having raw edges even; pin. Baste side and upper edges together.

29. To make **FLAT DART** in back sections, with **RIGHT** sides together, bring broken lines together, matching small dots. Stitch along broken line from wide end to point. Press dart toward center.

30. To form facing for pocket, turn upper edge of **BACK POCKET** (7) to **OUTSIDE** along 3/4" (2cm) hem allowance. Turn up raw edge 1/4" (6mm). Press. Stitch along seam line on raw edges. Trim seam allowance in the facing area to 1/4" (6mm).

31. Turn corners **RIGHT** side out, turning facing to the **WRONG** side; press, pressing under raw edges along stitching, folding out fullness at corners. Stitch facing close to inner edge.

32. On **OUTSIDE**, pin pocket to back, matching large dots. **EDGE STITCH** and **TOPSTITCH** side and lower edges of pocket.

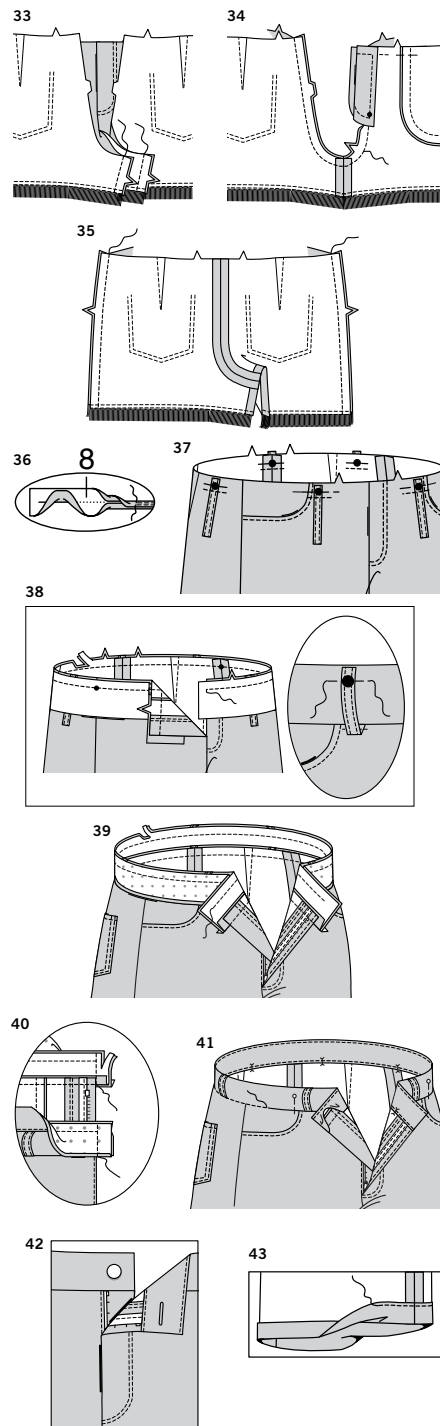

33. Stitch front to back at inner leg edges.

34. With **RIGHT** sides together, pin center seam, matching inner leg seams and notches. Stitch from upper back edge to front connecting to previous stitching. To reinforce seam, stitch again over first stitching.

35. Stitch front to back at side edges.

36. To make **BELT LOOP**(s), fold **CARRIER** (8) in half, lengthwise with **WRONG** sides together. Press, setting in a crease. Open out long edges of carrier and turn them to **WRONG** side so that they meet at the crease. Press. Fold carrier in half lengthwise, bringing pressed edges together. Stitch close to both long edges.

37. Cut carriers into five, 4" (10cm) long sections. On **OUTSIDE**, pin carriers to upper edge of pants over large dots with raw edges even. Baste along seamline. Stitch to shorts or pants 3/8" (1cm) from first stitching.

38. With **RIGHT** sides together, pin **WAISTBAND** (9) to garment, matching centers and notches, placing small dots at side seams. Baste; stitch. **TRIM SEAM.** Press band out, pressing seam toward band. Baste ends of carriers to upper edge of waistband at large dots with raw edges even.

39. Press under 1/2" (1.3cm) on long notched edge of waistband facing; trim to 1/4" (6mm). On **OUTSIDE**, pin facing to waistband at upper edge, having raw edges even. Stitch. **TRIM SEAM.**

40. **UNDERSTITCH** the facing. Stitch facing to waistband at ends. **TRIM SEAM.**

41. Turn facing to **INSIDE**; press. Pin pressed edge of facing over seam, placing pins on **OUTSIDE**. On **OUTSIDE**, **STITCH IN THE DITCH** of the seam, catching in pressed edge of facing on the **INSIDE**.

42. Make buttonhole in band at marking. Sew button to band at small dot.

43. **FOR VIEW B** – Press under 5/8" (1.5cm) hem allowance on lower edge of pant leg. To form **NARROW HEM**, tuck under raw edge to meet crease. Press. Stitch hem in place.



Congrats!

You've completed your sewing adventure

SHARE YOUR LOOK



Post your pattern and tag us
@simplicity_creative_group and **#simplicitypatterns**
for a chance to be featured on our social media.

Look for more PDF patterns at [simplicity.com](https://www.simplicity.com)

Have a question or need help with your sewing project call us at
1-888-588-2700



Simplicity ©2024 a division of IG Design Group Americas Inc. • Atlanta, GA 30342 USA www.thedesigngroup.com • All Rights Reserved. www.simplicity.com • Made in the U.S.A. Fabriqué aux États-Unis.

To be used for individual private home use only and not for commercial or manufacturing purposes. • A usage privé seulement et non à des fins commerciales ou de production en série. • Para uso privado solamente, no se puede utilizar con propósitos de comercialización o de producción en serie.