Simplicity



Shop all the pattern brands you love @

Simplicity[®].com

Average

DOLL HOUSE BACKPACK WITH BEAR

DISCLAIMER: This product is not suitable for children under 3 years of age.

Suggested Fabrics: House A, Rooms, Window Glasses, Roof/Flap, Pockets, Tablecloth, Bear B, Shower Cap D: Cotton/Cotton Blends. Bathroom Mirror, Shower: Metallic Fabric. Appliqués, Doors, Tub, Bear Accessories: Felt. Interfacing: Sew-in Fleece.

Notions: A: Four 11/2" (4cm) flower appliqués, sixteen assorted %" - 3/4" (1cm - 2cm) buttons, four 5/16" (9mm) buttons (for stove knobs), 2" (5cm) length of 1" (5cm) hook and loop tape, % yd. (0.6m) of 1/6" (3mm) elastic, 1½" (4cm) tassels and ¼" (6mm) beads (optional for cabinet doors), brown embroidery floss (for coffee cup and pie), 13" (33cm) length of metallic baby rick rack (for Christmas tree), 3" (8cm) length of 1/4" (6mm) ribbon (for presents) in each of three different colors, 11" (28cm) length of ½" (1.3cm) flower trim, 2¾ yds. (2.6m) of 1" (2.5cm) grosgrain ribbon (for handle and ties), 10" (25cm) length of %" (1cm) grosgrain ribbon (for loops). B: Polyfil, brown embroidery floss, two ¼" (6mm) beads. D,E,F,G,H,I: 1 yd. (0.9m) of ½" (3mm) elastic (total). Also for D: Pinking shears, Awl. Also for F: Five purchased 1/2" (13mm) flowers. Also for G: 10" (25cm) length of medium rick rack in each of two different colors. Also for H: Squeeze paint or white

HOUSE A - 16" H x 22" W OPEN (41cm x 56cm), 9" H x 12" W FOLDED (23cm x 30cm)

45"* - ½ yd. (115cm* - 0.5m) Rooms - One 9" x 111/2" (23cm x 29cm) fabric remnant in four different colors Roof/Flap - 13" x 10" (33cm x 25cm) fabric remnant Front Door - 9" x 12" (23cm x 30cm) felt sheet Window Glass - 3" x 3" (8cm x 8cm) fabric remnant Window Frame - 9" x 12" (23cm x 30cm) felt sheet Interfacing: 45*** - 1 yd. (115cm** - 1.0m) Paper-Backed Fusible Web (for House A including all rooms): 17" - 1½ yds. (43cm - 1.4m)

	î.
Bedroom	Living Room
Pocket/Blanket Pocket - 12" x 5"	Window Glass - 3" x 3" (8cm x 8cm) fabric r

Cabinet Pocket/Blan Cabinet Back/Cabinet Doors - Two 9" x 12" (30cm x 13cm) fabric remnant Cabinet/Cabinet Doors - Two 9" x 12" (23cm x 30cm) (23cm x 30cm) felt sheets felt sheets Presents - 1" x 1" (2.5cm x 2.5cm) felt remnant in Headboard - 9" x 12" (23cm x 30cm) felt sheet three different colors Pillow - 3" x 2" (8cm x 5cm) felt remnant Window Frame, Tree, Chair, Chair Seat/Arm Cushions - 9" x 12" (23cm x 30cm) felt sheet in four different

<u>Kitchen</u>

Cabinet Pocket - 4" x 3" (10cm x 8cm) fabric remnant Window Glass - 3" x 3" (8cm x 8cm) fabric remnant Mirror/Shower - 8" x 5" (20cm x 13cm) fabric remnant Tablecloth - 6" x 4" (15cm x 10cm) fabric remnant Towel - 21/2" x 2" (6cm x 5cm) felt remnant Plate, Pie Bottom - 2" x 2" (5cm x 5cm) felt remnant Mirror Frame, Cabinet/Cabinet Doors, Tub - 9" x 12" in two different colors (23cm x 30cm) felt sheet in three different colors Cup - 1½" x 1½" (4cm x 4cm) felt remnant Pie Top - 2½" x 1½" (6cm x 4cm) felt remnant Window Frame, Table Legs - 6" x 3" (15cm x 8cm) felt remnant in two different colors Stove Hood, Stove, Stove Top/Stove Door/Stove Opening - 9" x 12" (23cm x 30cm) felt sheet in three

BEAR B - 434" H (12cm) AND ACCESSORIES C-I

BEAK B - 4% H (12cm) AND ACCESSURIES C-I	
BEAR B - One 12" x 8" (30cm x 20cm) fabric remnant	EARS F - 3½" x 1½" (9cm x 4cm) felt remnant
SCARF C - 1" x 10" (2.5cm x 25cm) felt remnant	APRON G - One 6½" x 3 (17cm x 8cm) remnant in each of felt and paper-backed fusible web
SHOWER CAP D - 5" x 5" (12cm x 12cm) fabric remnant	HEART H - One 6½" x 6" (17cm x 15cm) remnant in each of felt and paper-backed fusible web
	PUMPKINI - One 6½" x 5½" (17cm x 14cm) felt remnant Pumpkin Face - 2" x 2" (5cm x 5cm) felt remnant Paper-backed Fusible Web - 9" x 5½" (23cm x 14cm) remnant

*with nap **without nap









ဂ	V
D	0

п ≬ **⊐** (E)

വ 🗇


I








Thank you for purchasing this Simplicity pattern. We made every effort to provide you with a high quality product.





19 Living Room-A 20 Living Room Cabinet-A 21 Tree-A

30 Kitchen Stove Hood-A

25 Living Room Window Glass-A 25 Living Room Window Glass-A 26 Living Room Window Frame-A 27 Chair-A 28 Chair Seat and Arm Cushion-A

23 Present 2-A 24 Present 3-A

29 Kitchen-A

Front Door-A

Bedroom Cabinet-A Bedroom Cabinet Pocket-A Redroom Headboard-A

1 Bathroom-A 2 Mirror Glass-A 3 Mirror Frame-A


4 Bathroom Cabinet-A
5 Bathroom Cabinet Pocket-A
6 Tub-A 31 Kitchen Stove Hood-J 31 Kitchen Table Leg-A 32 Tablecloth-A 33 Plate-A 34 Cup-A

35 Kitchen Window Glass-A 36 Kitchen Window Frame-37 Stove-A 38 Stove Top and Oven-A 39 Pie Pan-A

40 Pie-A 41 Roof/Flap-A 43 Scarf-C 44 Shower Cap-D 45 Sleep Mask-E 46 Bunny Ears-F 47 Apron-G

48 Heart-H 49 Pumpkin-I 50 Pumpkin Face-I

www.simplicity.com



1-888-588-2700

General Directions

The Pattern

SYMBOLS GRAIN LINE Place on straight grain of fabric parallel to selvage

PLACE SOLID LINE on

CENTER FRONT OR BACK of garment. V VV NOTCHES

> O DOTS CUTTING LINE

LENGTHEN OR SHORTEN LINES SEAM ALLOWANCE: 5/8" (1.5cm)

unless otherwise stated is included but not printed on MULTI-SIZE PATTERNS. Mark your size with colored felt tip pen.

See chart on tissue for how to use MULTI SIZE PATTERNS. lower edge of pattern.

ADJUST IF NEEDED

Make adjustments before placing pattern on fabric.

> Cut pattern between lengthen or shorten lines Spread pattern evenly, the and tape to paper.

TO LENGTHEN:

TO SHORTEN: At lengthen or

shorten lines, make an even pleat taking up amount needed. Tape in place.

When lengthen or shorten lines are not given, make adjustments at

Cutting/Marking BEFORE CUTTING:

PRESS pattern pieces with a warm dry iron. PRE-SHRINK fabric by pre-washing washables or steam-pressing non-washables.

AFTER CUTTING:

Transfer markings to WRONG side of fabric before removing pattern. Use pin and chalk method or dressmaker's tracing paper and wheel.

- . Snip edge of fabric to mark notches, ends of fold lines and center lines.
- · Pin mark dots.

- Sewing SEW garment following Sewing Directions.
- · PIN or machine-baste seams matching notches.
- STITCH 5/8" (1.5 cm) seams unless otherwise stated.
- · PRESS seams open unless otherwise indicated clipping when necessary so seams will lie flat
- · TRIM seams to reduce bulk, as shown below



seams into layers


Trim corners



Clip inner

Notch outer


Sewing Directions




6

ELASTIC LOOPS





POCKET CONSTRUCTION



RIGHT SIDE WRONG SIDE INTERFACING // LINING

Read General Directions above before you begin.

Sewing methods shown in BOLD TYPE are defined below:

PREPARE APPLIQUE - Fuse paper back fusible web to WRONG side of applique fabric following manufacturer's instructions. Pin pattern to RIGHT side of prepared fabric. Cut out each applique. Transfer markings to RIGHT side of applique using a washable fabric marking pen or pencil.

FUSE - Remove paper backing from applique. Pin applique(s) to item within placement lines as instructed in sewing directions. Fuse in place following manufacturer's instructions.

ELASTIC LOOPS

Method 1: Cut a 4" (10cm) piece of 1/8" (3mm) wide elastic. Fold elastic in half and make a knot 1/2" (1.3cm) from fold.

Method 2: Cut a 2-1/2" (6.5cm) piece of 1/8" (3mm) wide elastic. Fold elastic in half bringing ends together. Hand sew ends together for 1/2" (1.3cm).

OPTIONAL: Hand sew a bead or purchased tassel to loop at fold.

POCKET CONSTRUCTION

Fold POCKET along foldline, RIGHT sides together. Stitch ends creating a facing, continuing to stitch along stitching lines on sides and lower edges.


Turn facing to inside, turning under sides and lower edges along stitching. Press. Stitch close to edge of facing.

Attach pocket to items as instructed in sewing directions.

SEWING TUTORIALS



Build your skills viewing short, easy-to-follow videos at simplicity.com/sewingtutorials



Sewing methods in BOLD TYPE have Sewing Tutorial Video available. Scan QR CODE to watch videos:

EDGESTITCH - See Machine Stitches: "how to edgestitch"

SLIPSTITCH - See Hand Stitching: "how to slip stitch" video.

STITCH IN THE DITCH - See Machine Stitches: "how to stitch in the ditch" video

PATTERN PIECES WILL BE IDENTIFIED BY NUMBERS THE FIRST TIME THEY ARE USED.

STITCH 1/4" (6MM) SEAMS WITH RIGHT SIDES TOGETHER UNLESS OTHERWISE STATED.

HOUSE A


NOTE: When fusing metallic fabrics, use a press cloth.

EXTERIOR

1. Cut length of 1" (2.5cm) wide grosgrain ribbon in half across width of ribbon. Pin halves together having long edges even. Stitch close to long edges.


2. For handle, cut a 5" (13cm) piece from stitched ribbon. For straps, cut the remaining stitched ribbon in half. For loops, cut two pieces from 3/8" (1cm) wide grosgrain ribbon each 3" (7.5cm) long. Fold each loop in half having ends even. Turn under 1/2" (1.3cm) on ends.

2 of 6



3. Pin ends of handle to RIGHT side of HOUSE (1) at upper edge, between handle placement lines, having raw edges even. Pin one end of each strap to upper edge of house between strap placement lines, having raw edges even. Baste.

Pin loops to RIGHT side of house over placement lines. Stitch along placement lines, as shown. Cut a 5-1/2" (14cm) piece of 1/8" (3mm) wide elastic and make **ELASTIC LOOP** following method 1. Pin ends of elastic to OUTSIDE of house along placement lines for elastic loop. Hand sew ends in place.

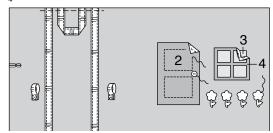

4. PREPARE APPLIQUE for FRONT DOOR (2), HOUSE WINDOW GLASS (3), and HOUSE WINDOW FRAME (4).


Cut out squares on window frame. FUSE window glass to house.

FUSE window frame over window glass.

FUSE front door to house. Stitch along stitching lines on front door.


Sew button to front door. Sew flowers appliques to house under window, as desired or as shown on front of envelope.






5. Cut two 3/4" (2cm) pieces of hook and loop tape. Separate tape. Stitch loop half of tape to RIGHT side of house within placements lines.

6. Baste INTERFACING to WRONG side of one






7. Pin roof sections RIGHT sides together. Stitch, leaving upper edge open.




8. Turn RIGHT side out. Press. With RIGHT sides together (hook and loop tape face up), pin roof to upper edge of house exterior, over straps and handle, matching small dots. Baste.



BEDROOM

9. TRANSFER MARKINGS to right side of BEDROOM (5). Baste INTERFACING to WRONG side of bedroom.




10.PREPARE APPLIQUE for BEDROOM HEADBOARD (8),

BEDROOM PILLOW (9).

FUSE bedroom headboard to bedroom. FUSE bedroom pillow to bedroom headboard.




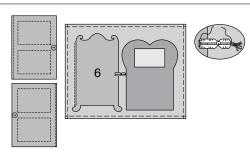

11.PREPARE APPLIQUE for BEDROOM CABINET (6), FUSE cabinet back to bedroom.

Make **ELASTIC LOOP** using method 1. Hand sew ends of loop to cabinet at placement lines, as shown. Optional: Hand sew tassel to loop at fold.

12

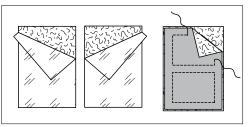


12. Remove paper backing from outside and inside cabinet doors. FUSE doors WRONG sides together. Stitch along inner stitching lines.


16

S9976


3 of 6



13. Make BEDROOM CABINET POCKET (7) and BEDROOM BLANKET POCKET (10) following POCKET CONSTRUCTION. Pin cabinet pocket to cabinet and blanket pocket to headboard, matching small dots. Stitch close to sides and lower edges.




14. Pin cabinet door to bedroom over cabinet, matching stitching lines. Stitch side of door along stitching lines through all thicknesses. Sew button to door at marking.



BATHROOM

15.TRANSFER MARKINGS to right side of BATHROOM (11). Baste INTERFACING to WRONG side of bathroom.




16. PREPARE APPLIQUE for MIRROR GLASS (12), MIRROR FRAME (13), and SHOWER (18).

FUSE mirror glass to bathroom.

Cut out inside circle from mirror frame. **FUSE** mirror frame over mirror glass. Pin flower trim to mirror frame butting ends. Hand sew in place.


FUSE shower to bathroom.



17. Slash TOWEL (17) along solid lines at lower edge. Pin towel to TUB (16) within placement lines having upper edges even. Stitch 1/8" (3mm) on upper edge of tub between small


Stitch 1/8" (3mm) on upper edge of tub between sma dots.

18. Pin tub to bathroom matching small dots, placing outer edge of tub along placement lines. NOTE: Tub is wider at top to create a space for bear to slide in. Stitch sides and lower edges along stitching lines beginning and ending at small dots, leaving upper edge between small dots open.



19. PREPARE APPLIQUE for BATHROOM CABINET (14).
FUSE cabinet back to bathroom.


Make **ELASTIC LOOP** using method 1. Hand sew ends of loop to cabinet back at placement lines, as shown.




21

20. Make BATHROOM CABINET POCKET (15) following POCKET CONSTRUCTION. Pin bathroom cabinet pocket to cabinet matching small dots. Stitch close to sides and lower edges.

21. Remove paper backing from outside and inside cabinet doors. FUSE doors WRONG sides together. Stitch along inner stitching lines on door.




22. Pin cabinet door to bathroom over cabinet, matching stitching lines. Stitch side of door along stitching lines through all thicknesses. Sew button to door at marking.



LIVING ROOM

23.TRANSFER MARKINGS to right side of LIVING ROOM (19). Baste INTERFACING to WRONG side of living room.




24. PREPARE APPLIQUE for LIVING ROOM WINDOW GLASS (25), LIVING ROOM WINDOW FRAME (26), CHAIR (27), and CHAIR SEAT/ARM CUSHIONS (28). FUSE window glass to living room.
Cut out squares on window frame. FUSE window frame

to living room over window glass.


FUSE chair to living room. **FUSE** chair arm cushions and seat cushion to chair.

4 of 6


25



25. PREPARE APPLIQUE for LIVING ROOM CABINET (20). FUSE living room cabinet back to living room.




26. Remove paper backing from outside and inside doors. FUSE RIGHT doors WRONG sides together. FUSE LEFT doors WRONG sides together. Stitch along inner stitching lines.



27. Make ELASTIC LOOP using method 2. Hand sew ends of loop to RIGHT inside cabinet door at placement lines, as shown. Optional: Hand sew tassel to loop at fold.

Hand sew ends of a 2-1/2" (6.5m) piece of 1/8" (3mm) wide elastic to RIGHT inside door at small



28. Pin RIGHT door to cabinet back matching stitching lines. Pin LEFT door to living room matching stitching lines. Stitch along stitching lines.




Pin rick rack to tree along solid placement line. Stitch through center of rick rack.

FUSE tree to cabinet back and left inside door within placement lines.

FUSE presents to tree, left inside door, and cabinet hack

Tie each 1/4" (6mm) wide ribbon into a bow and sew to each present.


Hand sew buttons to tree at markings or as desired.



30. Hand sew button to left outside door at marking.

KITCHEN


31.TRANSFER MARKINGS to right side of KITCHEN (29). Baste INTERFACING to WRONG side of kitchen



32.PREPARE APPLIQUE for KITCHEN STOVE HOOD (30), KITCHEN TABLE LEG (31), KITCHEN WINDOW GLASS (35), and KITCHEN WINDOW FRAME (36). FUSE kitchen stove hood, kitchen table legs, and kitchen

window glass to kitchen.


Cut out squares from kitchen window frame. FUSE window frame to kitchen over window glass.



33. PREPARE APPLIQUES for STOVE (37). STOVE TOP AND OVEN (38), PIE PAN (39), and PIE (40).

FUSE oven opening to kitchen along solid placement line. FUSE pie pan to stove opening.


Make STRAIGHT stitches at markings on pie using six strand of brown embroidery floss.




34.FUSE pie to pie pan. Cut out opening on stove along solid lines. FUSE stove to kitchen over oven opening. Cut out openings on stove top. FUSE stove top to stove. Sew buttons to stove at markings.

35. Remove paper backing from outside and inside stove doors. FUSE doors WRONG sides together.






33



37. Pin door to stove within placement lines. EDGESTITCH lower edge of stove door.

38. Stitch TABLECLOTH (32) sections, RIGHT sides together, leaving an opening for turning.


39. Turn RIGHT side out. Press. SLIPSTITCH opening. Pin tablecloth to kitchen over table legs along placement lines. NOTE: Tablecloth is wider to create a space for bear to slide in. Stitch ends between small dots, as shown.



40. PREPARE APPLIQUE for PLATE (33) and CUP (34). FUSE plate to tablecloth. Fill in marked areas on cup with STRAIGHT stitches, using six strands of embroidery floss, as shown. FUSE cup to kitchen within placement lines.


5 of 6

41




INTERIOR AND FINISHING


41. For interior, with RIGHT sides together, pin right side of bedroom to left side of bathroom. Stitch. Press. With RIGHT sides together, pin left side of living room to right side of kitchen. Stitch. Press.




42. Stitch lower edge of bedroom/bathroom to upper edge of living room/kitchen, matching seams. Press.



43. With RIGHT sides together, pin exterior to interior, having raw edges even. Stitch, leaving an opening for turning.




44. Turn right side out. Press. **SLIPSTITCH** opening closed. On INSIDE, **STITCH IN THE DITCH** of room seams through all thicknesses.



45. Sew button to outside of exterior at marking.


To wear backpack, fold in half lengthwise with interior rooms facing. Fold in half again. Fold roof over front and fasten with Velcro. Thread straps through loops and tie.



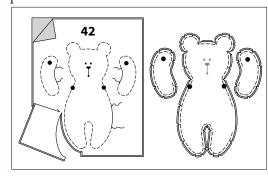


 Transfer shapes to WRONG side of one BEAR (42) section. Pin bear sections, RIGHT sides together. Stitch along marked lines, leaving openings on body and arms for turning.

Cut out body and arms 1/4" (6mm) away from stitching, clipping curves, and inward corners.




2. Turn right side out. Stuff. SLIPSTITCH openings closed.

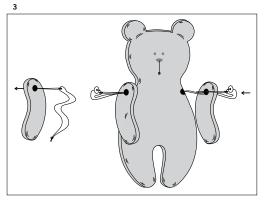

3. Thread a long needle with strong thread and knot ends together. Insert needle into arm at small dot going in at the inside of arm coming out on the outside of the arm. Pick up a bead and insert needle back through arm at small dot. Then insert needle through body at small dots. Continue through second arm and pick up a bead. Go back through arm and body and through first arm. Repeat again.

Knot ends. Bury thread ends by going through arm again into body.

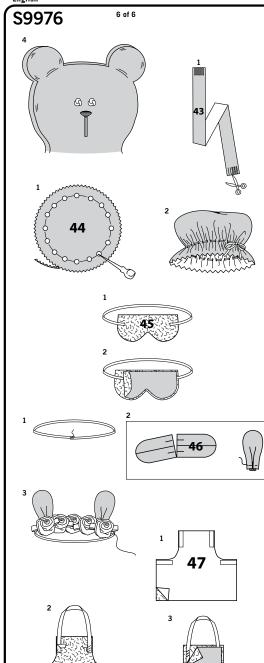

 Using six strands of embroidery floss, make FRENCH knots for eyes, SATIN stitch for nose, and a STRAIGHT stitch below nose.

SCARF C

1. To fringe ends, cut SCARF (43) along solid lines, as shown

SHOWER CAP D

- Trim edge of SHOWER CAP (44) with pinking shears.
 Using an awl, poke holes into shower cap at small dots.
- 2. Thread a 6-1/2" (16cm) long piece of 1/8" (3mm) wide elastic through holes. Tie ends in a tight bow.

SLEEP MASK E


- PREPARE APPLIQUE for SLEEP MASK E (45). Remove paper backing from one sleep mask. Cut a 4-1/4" (11cm) piece of 1/8" (3mm) wide elastic. Lap ends of elastic 3/8" (1cm) over WRONG side of sleep mask.
- Remove paper backing from remaining sleep mask. FUSE sleep masks, WRONG sides together, sandwiching the ends of the elastic in between.

BUNNY EARS F

- Cut a 4-1/4" (11cm) piece of 1/8" (3mm) wide elastic. Lap ends of elastic 3/8" (1cm) and hand sew together.
- Cut BUNNY EARS (46) in half along center line. To make pleats, bring broken lines to solid line. Baste across lower edge.
- **3.** Stitch ears to center of elastic. Hand sew ribbon rosettes to elastic over ears.

APRON G

- PREPARE APPLIQUE for APRON G (47). Remove paper backing.
- For shoulder strap, cut a 3-3/8" (9.5cm) piece of 1/8" (3mm) wide elastic. On WRONG side of apron back pin ends of elastic along placement lines, as shown. Hand sew ends in place.
 - For waist ties, cut a 2-3/4" (7cm) piece of 1/8" (3mm) wide elastic. On WRONG side of apron back pin ends along placement lines. Hand sew ends in place.
- FUSE apron front to apron back, WRONG sides together, encasing only the ends of the elastic in between. Pin rick rack to OUTSIDE of apron along placement lines turning ends to back of apron. Stitch through center of rick rack.

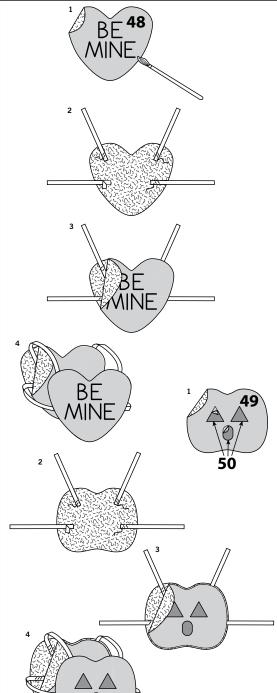

HEART H

- PREPARE APPLIQUE for HEART (48). Remove paper backing. Paint or embroider letters on heart front.
 For embroidery, use six strands of embroidery floss and STRAIGHT stitches.
- 2. For shoulder straps, cut two 1-3/8" (3.5cm) pieces of 1/8" (3mm) wide elastic. For waist straps, cut two 1-5/8" (4cm) pieces of 1/8" (3mm) wide elastic. Pin one end of each shoulder elastic to WRONG side of front inside heart along placement lines for shoulders, as shown. Pin one end of each waist elastic to front inside heart along placement lines for waist. Hand sew ends of elastic in place.
- **3. FUSE** heart front to front inside heart, WRONG sides together, encasing only the ends of the elastic.
- 4. Pin free ends of elastic to WRONG side of back inside heart along placement lines. Hand sew ends of elastic in place. FUSE heart back to back inside heart WRONG sides together, encasing only ends of elastic.

PUMPKIN I

- PREPARE APPLIQUE for PUMPKIN (49) and PUMPKIN FACE (50). FUSE pumpkin face to RIGHT side of pumpkin front.
- 2. For shoulder straps, cut two 1-3/8" (3.5cm) pieces of 1/8" (3mm) wide elastic. For waist straps, cut two 1-5/8" (4cm) pieces of 1/8" (3mm) wide elastic. Pin one end of each shoulder elastic to WRONG side of front inside pumpkin along placement lines for shoulders, as shown. Pin one end of each waist elastic to front inside pumpkin along placement lines for waist. Hand sew ends of elastic in place.
- **3. FUSE** pumpkin front to front inside pumpkin, WRONG sides together encasing only the ends of the elastic.
- 4. Pin free ends of elastic to WRONG side of back inside pumpkin along placement lines. Hand sew ends of elastic in place. FUSE pumpkin back to back inside pumpkin, WRONG sides together, encasing only ends of elastic.





SHARE LOOK









Post your pattern and tag us @simplicity_creative_group and #simplicitypatterns for a chance to be featured on our social media.

Look for more PDF patterns at **simplicity.com**

Have a question or need help with your sewing project call us at 1-888-588-2700

