
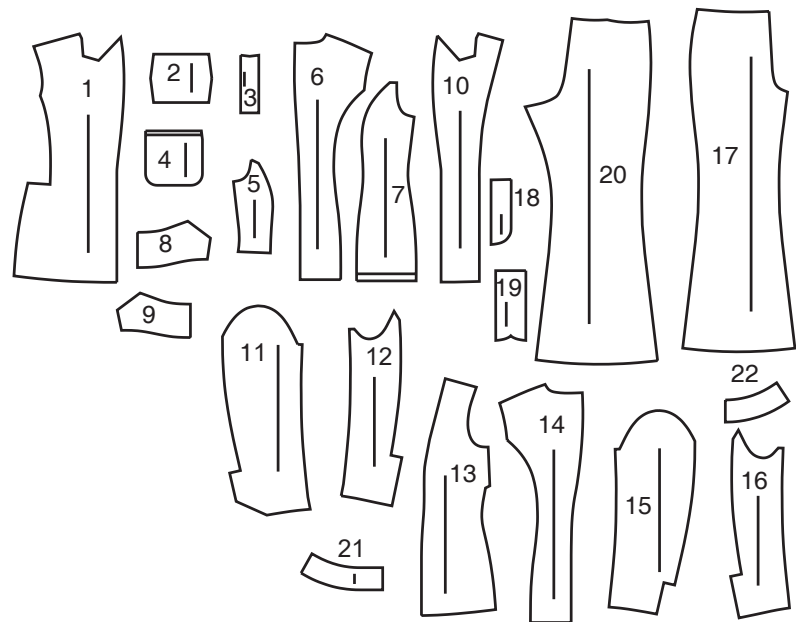


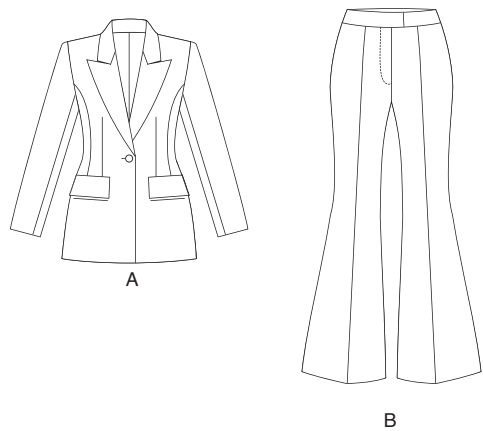

1 FRONT - A
2 FLAP - A
3 WELT - A
4 POCKET - A
5 SIDE FRONT - A
6 BACK - A
7 SIDE BACK - A
8 UPPER COLLAR - A
9 UNDER COLLAR - A
10 FRONT FACING - A
11 UPPER SLEEVE - A
12 UNDER SLEEVE - A
13 FRONT LINING - A
14 BACK LINING - A
15 UPPER SLEEVE LINING - A
16 UNDER SLEEVE LINING - A
17 FRONT - B
18 FLY - B
19 EXTENSION - B
20 BACK - B
21 WAISTBAND - B
22 BACK WAISTBAND - B

1 DEVANT - A
2 RABAT - A
3 BORDURE - A
4 POCHE - A
5 CÔTÉ DEVANT - A
6 DOS - A
7 CÔTÉ DOS - A
8 DESSUS DE COL - A
9 DESSOUS DE COL - A
10 PAREMENTURE DEVANT - A
11 DESSUS DE MANCHE - A
12 DESSOUS DE MANCHE - A
13 DOUBLURE DEVANT - A
14 DOUBLURE DOS - A
15 DOUBLURE DESSUS DE MANCHE - A
16 DOUBLURE DESSOUS DE MANCHE - A
17 DEVANT - B
18 BRAGUETTE - B
19 PROLONGEMENT - B
20 DOS - B
21 CEINTURE - B
22 CEINTURE DOS - B

BODY MEASUREMENTS / MESURES DU CORPS

MISSSES/JEUNE FEMME										
Sizes/Tailles	8	10	12	14	16	18	20	22	24	26
Bust (ins)	31½	32½	34	36	38	40	42	44	46	48
Waist	24	25	26½	28	30	32	34	37	39	41
Hip	33½	34½	36	38	40	42	44	46	48	50
Bk. Wst Lgth.	15¾	16	16¼	16½	16¾	17	17¼	17½	17¾	18
T. poitrine (cm)	80	83	87	92	97	102	107	112	117	122
T. taille	61	64	67	71	76	81	87	94	97	104
T. hanches	85	88	92	97	102	107	112	117	122	127
Nuque à taille	40	40.5	41.5	42	42.5	43	44	44	45	46

FABRIC CUTTING LAYOUTS



Indicates Bustline, Waistline, Hipline and/or Biceps. Measurements refer to circumference of Finished Garment (Body Measurement + Wearing Ease + Design Ease). Adjust Pattern if necessary.

Lines shown are CUTTING LINES, however, 5/8" (1.5cm) SEAM ALLOWANCES ARE INCLUDED, unless otherwise indicated. See SEWING INFORMATION for seam allowance.

Find layout(s) by Garment/View, Fabric Width and Size. Layouts show approximate position of pattern pieces; position may vary slightly according to your pattern size.

All layouts are for with or without nap unless specified. For fabrics with nap, pile, shading or one-way design, use WITH NAP layout.

RIGHT SIDE OF PATTERN	WRONG SIDE OF PATTERN	RIGHT SIDE OF FABRIC	WRONG SIDE OF FABRIC
-----------------------	-----------------------	----------------------	----------------------

S/T = SIZE(S)/TAILLE(S)
* = WITH NAP/AVEC SENS
S/L = SELVAGE(S)/LISIÈRE(S)
AS/TT = ALL SIZE(S)/TOUTES TAILLE(S)
** = WITHOUT NAP/SANS SENS
F/P = FOLD/PLIURE
CF/PT = CROSSWISE FOLD/PLIURE TRAME

Position fabric as indicated on layout. If layout shows...


GRAINLINE—Place on straight grain of fabric, keeping line parallel to selvage or fold. ON “with nap” layout arrows should point in the same directions. (On Fur Pile fabrics, arrows point in direction of pile.)

SINGLE THICKNESS—Place fabric right side up. (For Fur Pile fabrics, place pile side down.)

DOUBLE THICKNESS


WITH FOLD—Fold fabric right sides together.

* WITHOUT FOLD—With right sides together, fold fabric CROSSWISE. Cut fold from selvage to selvage (A). Keeping right sides together, turn upper layer completely around so nap runs in the same direction as lower layer.

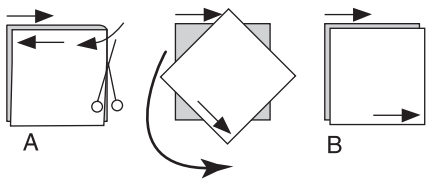

FOLD—Place edge indicated exactly along fold of fabric. NEVER cut on this line.

When pattern piece is shown like this...



• Cut other pieces first, allowing enough fabric to cut this piece (A). Fold fabric and cut piece on fold, as shown (B).

★ Cut piece only once. Cut other pieces first, allowing enough fabric to cut this piece. Open fabric; cut piece on single layer.

Cut out all pieces along cutting line indicated for desired size using long, even scissor strokes, cutting notches outward.


Transfer all markings and lines of construction before removing pattern tissue. (Fur Pile fabrics, transfer markings to wrong side.)

NOTE: Broken-line boxes (a! b! c!) in layouts represent pieces cut by measurements provided.


JACKET A

PIECES: 1,2,3,4,5,6,7, 8,9,10,11,12


45" (115 cm) *
S/T
8-10-12-14-16

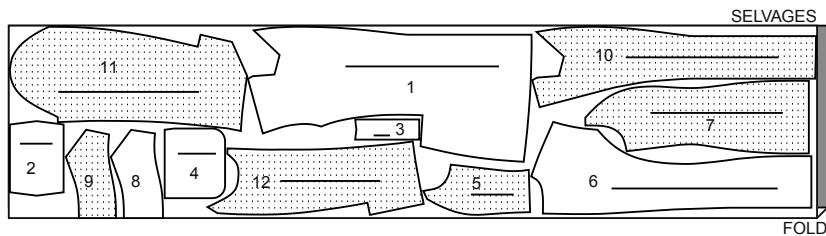


45" (115 cm) *
S/T
18-20-22-24-26

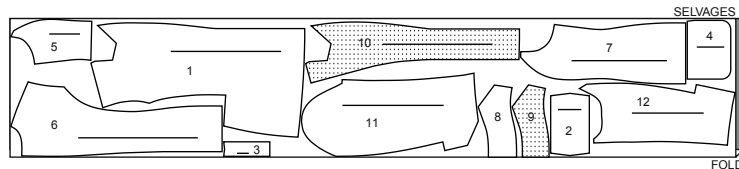

60" (150 cm) *
S/T
8-10-12-14-16

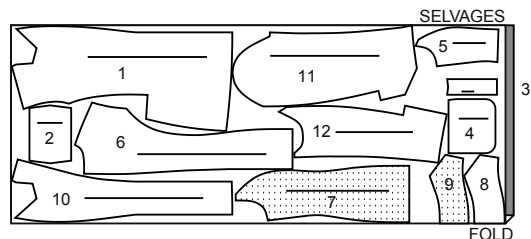


60" (150 cm) *
S/T
18-20-22-24-26

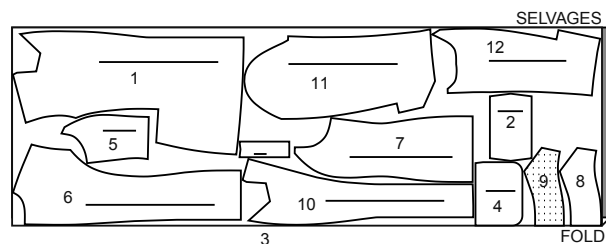

INTERFACING A

PIECES: 2,3,9,10


20" LIGHTWEIGHT FUSIBLE / 51CM THERMOCOLLANT LÉGER
AS/TT

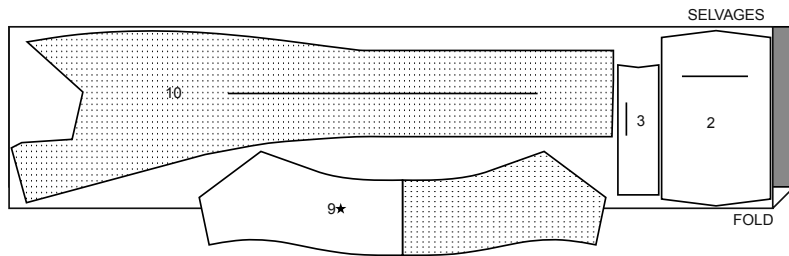

LINING A / DOUBLURE A

PIECES: 4,7,13,14,15,16


45" (115 cm) **
AS/TT

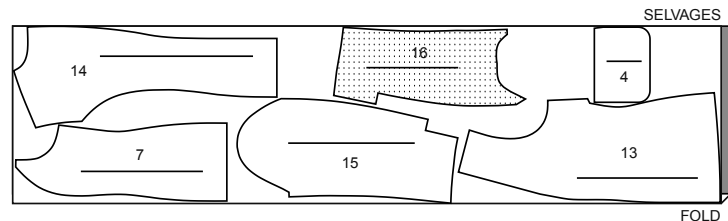


PANTS B

PIECES: 17,18,19,20,21,22


45" (115 cm) *
8-10-12-14

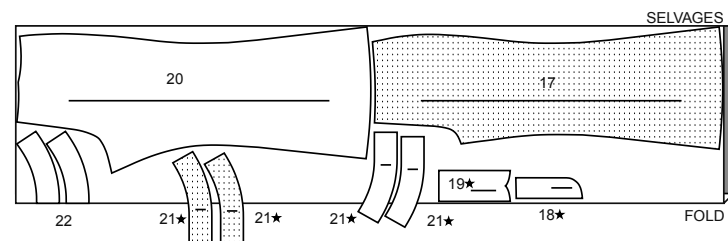


45" (115 cm) *
S/T
16-18-20-22-24-26

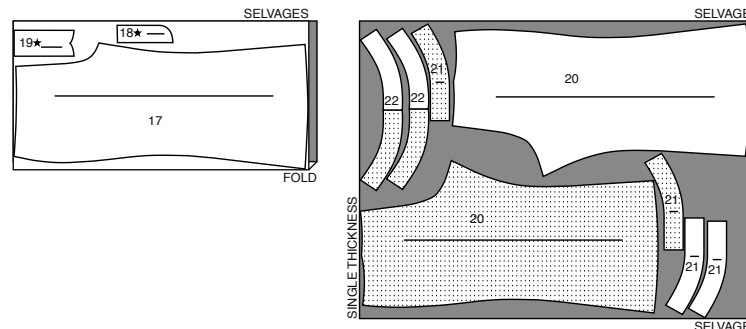

60" (150 cm) *
S/T
8-10-12-14-16

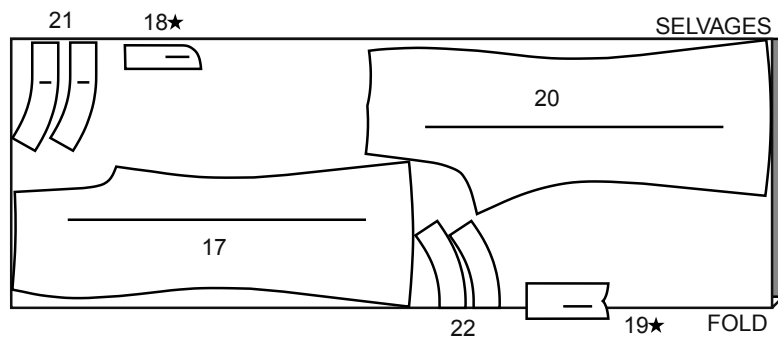


60" (150 cm) *
S/T
18-20-22-24-26

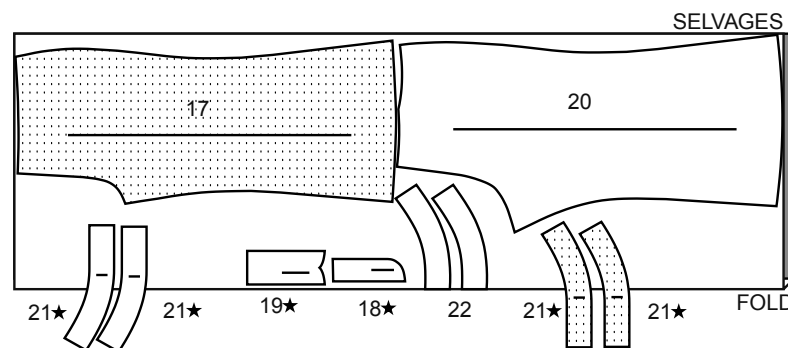

INTERFACING B

PIECES: 18,19,21,22

20" LIGHTWEIGHT FUSIBLE / 51CM THERMOCOLLANT LÉGER
AS/TT

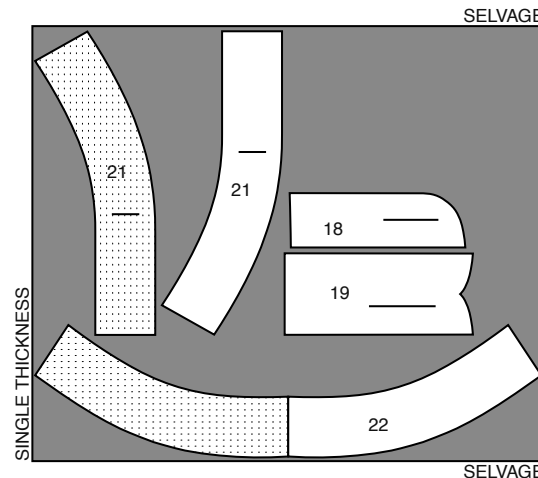


SEWING INFORMATION

5/8" (1.5cm) SEAM ALLOWANCES ARE INCLUDED, (unless otherwise indicated)

ILLUSTRATION SHADING KEY

Right Side	Wrong Side	Interfacing	Lining	Underlining

Press as you sew. Press seams flat, then press open, unless otherwise instructed. Clip seam allowances, where necessary, so they lay flat.



GLOSSARY

Sewing terms appearing in **BOLD TYPE** in Sewing Instructions are explained below.

EASESTITCH - Stitch along seamline, using long machine stitches. Pull thread ends when adjusting to fit.

NOTE: For sleeve caps, make a second row of long machine stitches 1/4" (6mm) away in seam allowance for more control.

EDGESTITCH - On outside, stitch close to pressed edge or seam.

FINISH - Stitch 1/4" (6mm) from raw edge and zig-zag or overlock.

INTERFACING - Apply to wrong side of fabric following manufacturer's directions.

REINFORCE - Stitch along seamline where indicated in sewing instructions, using a small machine stitch.

SLIPSTITCH - Slide needle through a folded edge, then pick up a thread of underneath fabric.

STAYSTITCH - Stitch 1/8" (3mm) from seam line in seam allowance (usually 1/2" (1.3mm) from raw edge).

UNDERSTITCH - Open out facing or underside of garment. Stitch close to seam, catching seam allowance underneath.


JACKET A

Front and Back


1. REINFORCE upper circles at inward corners of **FRONT** (1), stitching along seam line 1/2" (1.3cm) on each side of circles, pivoting with needle in the fabric at circles as shown. Clip to circles, being careful not to cut through stitching.

To make darts, with right sides together, fold fabric through the center of dart, bringing broken lines and small circles together. Stitch. Press dart toward front.


EASESTITCH between notches.

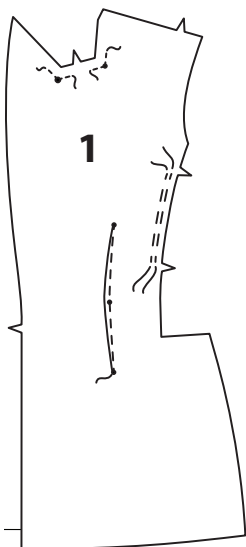


2. Cut along slash line to **LARGE** circle. With right sides together, stitch **SIDE FRONT** (5) to front, easing in fullness between notches. Press.

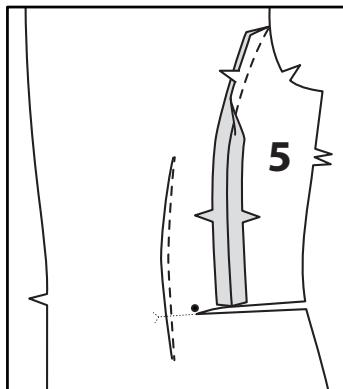


3. Cut a piece of fusible **INTERFACING** 1-3/4" (4.5cm) wide x 7" (18cm) in length. On inside, bring opening edges together. Apply **INTERFACING** from 1" (2.5cm) beyond end of pocket opening to side seam. Transfer makings to interfacing, if necessary. Cut along slash line and to small circles.

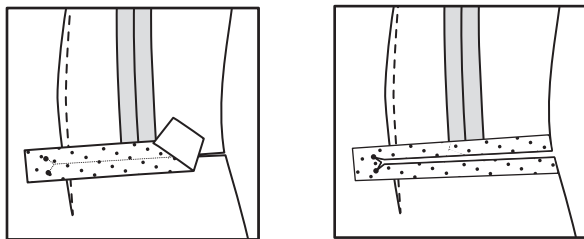


4. Apply **INTERFACING** to **FLAP** (2). Fold flap along foldline with right sides together. Stitch ends. Trim seam and corners.




5. Turn flap; press. Pin flap to right side of **POCKET** (4) matching circles. Machine baste 3/8" (1cm) from raw edge between small circles. Trim seam allowance to 1/4" (6mm).




6. Apply **INTERFACING** to welt (3). Fold welt along foldline with wrong sides together. Pin welt to right side of pocket lining having raw edges even. Machine baste 3/8" (1cm) from raw edge between small circles. Trim seam allowance to 1/4" (6mm).

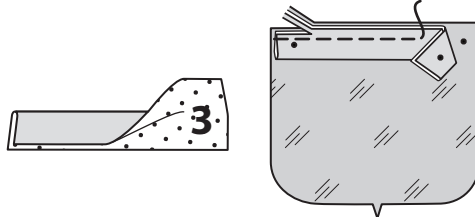


7. On outside, with right sides together, pin pocket and welt to lower edge of slashed edge, matching small circles. Stitch along stitching line between small circles. Trim seam to 1/4" (6mm). With right sides together, pin pocket and flap to upper edge. Stitch along stitching line between small circles.

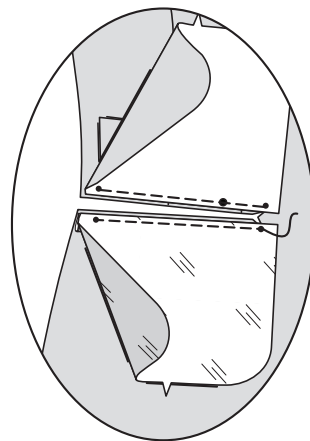


8. Turn pockets and clipped corner to the inside, bringing fold of welt to flap seam. To keep welt in place, on outside, catchstitch welt to pocket seam as shown.

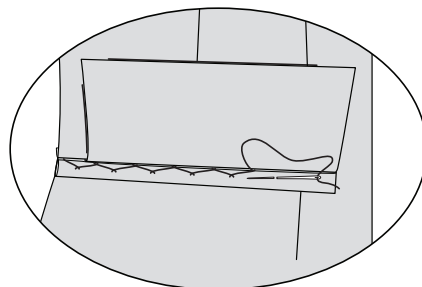


9. On inside, pin pockets together. Stitch raw edges together, catching in clipped corner; keeping front sections free at side seam. Press pocket flat, pressing flap down.

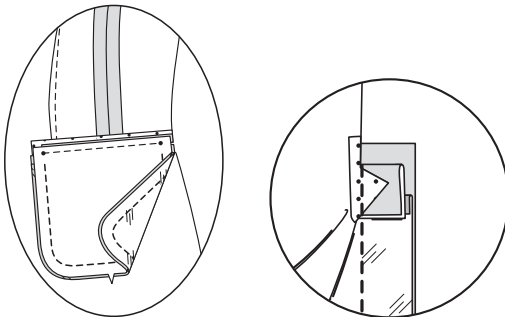


10. STAYSTITCH neck edge of **BACK** (6). Pin **SIDE BACK** (7) to back, matching notches. Stitch. Stitch front to back at shoulders. Press.

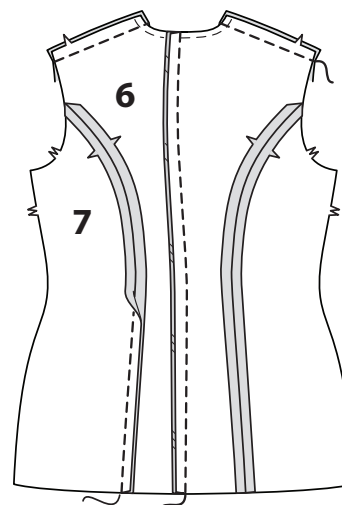


11. Pin front to back at side seams, keeping pocket free. Stitch from armhole edge to pocket and flap seam. Backstitch.

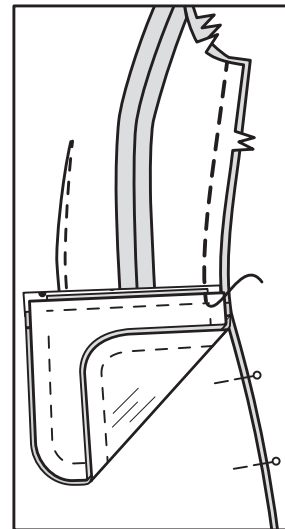


12. Lift pocket and sew remainder of side seam from welt to lower edge, making sure flap is not caught in the seam.

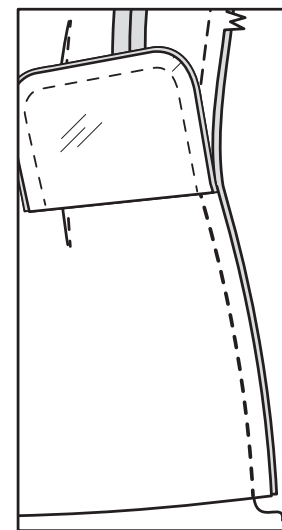

13. To reinforce welt and pocket area of the side seam, stitch side seam 1" (2.5cm) above and below pocket seam. Backstitch.




14. Apply **INTERFACING** to **UNDER COLLAR** (9). Clip back neck edge to staystitching along curves. With right sides together, pin under collar to jacket, matching notches and symbols, placing remaining circles at shoulder seams. Stitch between large circles, pivoting with needle in fabric at inner corners. Trim seam between shoulder seams. Press.

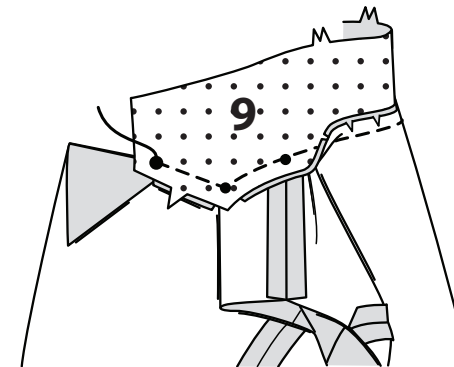


Sleeve

15. Cut a 2-1/2" (6.3cm) wide strip of fusible **INTERFACING** from a remnant. Apply to extensions on **UPPER SLEEVE** (11) and **UNDER SLEEVE** (12). Apply an additional strip 2" (5cm) wide, 1-1/2" (3.8cm) above lower edge of upper and under sleeve sections, making sure interfacing sections do not overlap.


REINFORCE upper circles at inward corners of extensions, stitching along seam line 1/2" (1.3cm) on each side of circles, pivoting with needle in the fabric. Clip to circles.

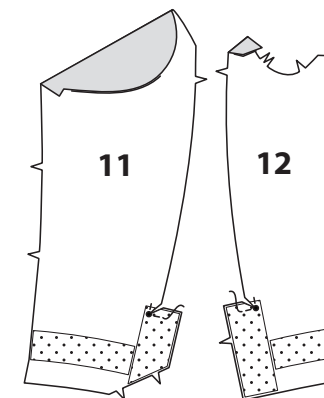


16. Pin upper sleeve to under sleeve at front edge, matching notches. Stitch, stretching upper arm to fit between notches.

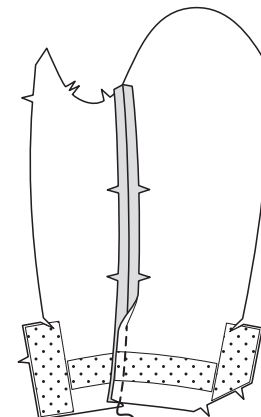


17. With right sides together, fold lower corner of upper sleeve, matching notches. Stitch in a 3/8" (1cm) seam, stopping 1/2" (1.3cm) from raw edge. Backstitch.




18. Turn corner and extension to inside along foldline, forming facing and pressing up hem.

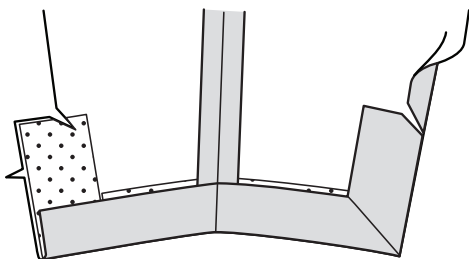


19. With right sides together, stitch back seam from armhole edge to large circle. Backstitch. **EASESTITCH** upper edge of sleeve between notches.

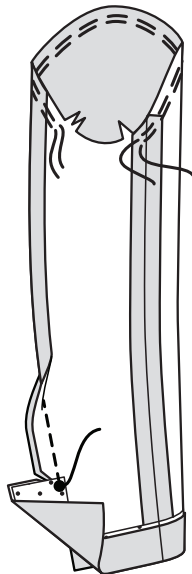

20. With right sides together, pin sleeve to armhole, matching notches, placing large circle at side seam and small center circle at shoulder seam. Adjust ease. Baste. Stitch. Stitch again 1/8" (3mm) from first stitching within seam allowance. Trim seam below notches close to stitching. Press seam allowance, shrinking out fullness.




21. (A) Try on jacket for shoulder pad placement. Pin pad to garment, extending outer edge about 5/8" (1.5cm) beyond armhole seam. (B) Sew pad to shoulder seam allowance; tack ends to armhole seam.

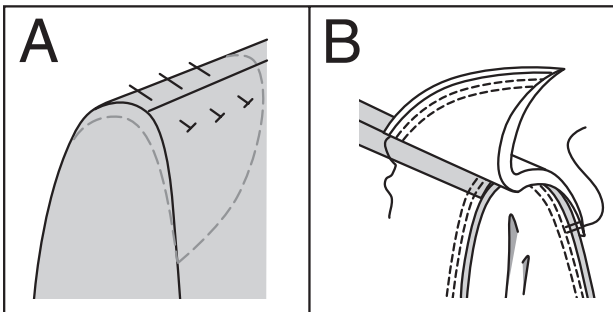


Lining


22. Apply **INTERFACING** to **FRONT FACING** (10). Reinforce large and small circles at neck edge. Clip to circles. To make dart in **FRONT LINING** (13), with right sides together, fold fabric through center of dart, bringing broken lines and small circles together; pin. Stitch from wide end to point. Pin front lining to front facing matching symbols. Stitch from upper edge to small circle. Press seam toward lining.

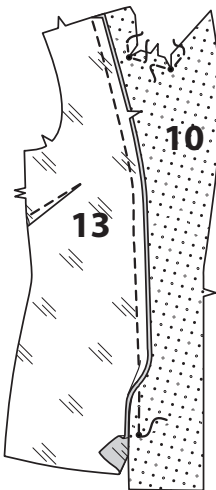


23. **STAYSTITCH** neck edge of back lining (14). Stitch center back seam. To make pleat at neck edge, stitch along stitching line to small circle. Backstitch. Press center back seam and pleat to one side. Stitch **SIDE BACK** (7) lining sections to each side of back lining. Press. Stitch back to front at shoulder, easing back to fit. Stitch side seams.

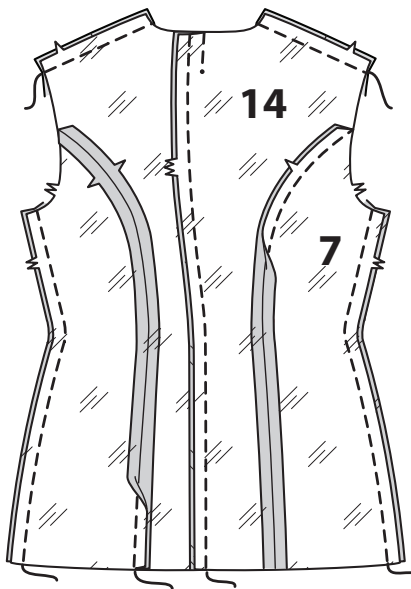


24. **REINFORCE** circles at inward corners of extensions of **UPPER SLEEVE LINING** (15) and **UNDER SLEEVE LINING** (16), stitch along seam line 1/2" (1.3cm) on each side of circles, pivoting with needle in the fabric. Clip inward corners to circles. Pin upper sleeve lining to under sleeve lining at front edge, matching notches. Stitch, stretching upper sleeve lining between notches to fit. Pin back edges of sleeve lining, matching symbols. Stitch from armhole edge to large circle. Backstitch. **EASESTITCH** upper edge between notches.

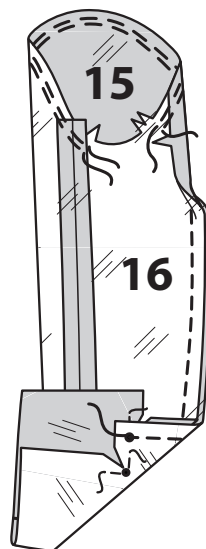


25. With right sides together, pin sleeve to armhole, matching notches, placing large circle at side seam and small center circle at shoulder seam. Adjust ease. Baste. Stitch. Stitch again 1/8" (3mm) from first stitching within seam allowance. Trim seam below notches close to stitching. Press seam allowance, shrinking out fullness.

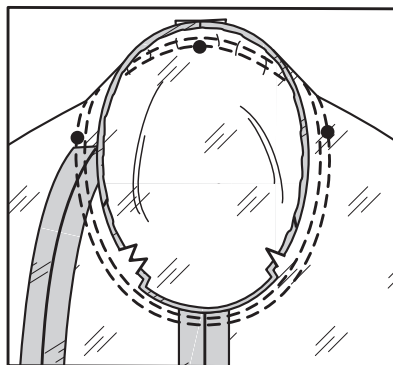


26. Clip neck edge back lining to staystitching along curves. With right sides together, pin **UPPER COLLAR** (8) to front facing and lining, matching notches and symbols, placing remaining circles at shoulder seams. Stitch between large circles, pivoting with needle in fabric at inner corners. Trim seam between shoulder seams. Press seam open.

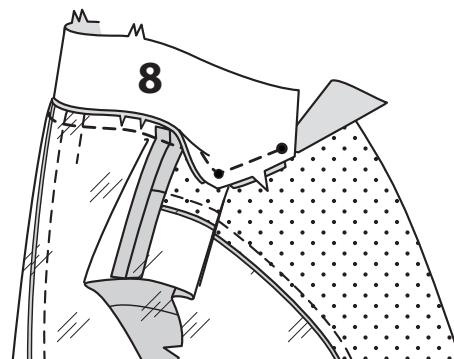


27. With right sides together, pin facing and lining to jacket, matching centers and symbols. Stitch front and upper edges of collar between large circles. Backstitch at circles. Stitch facing from large circle to hemline, pivoting with needle in fabric at small circle, forming lapel of jacket. Trim collar seams and front seam. Trim corners. **UNDERSTITCH** facing from waistline to lower edge.

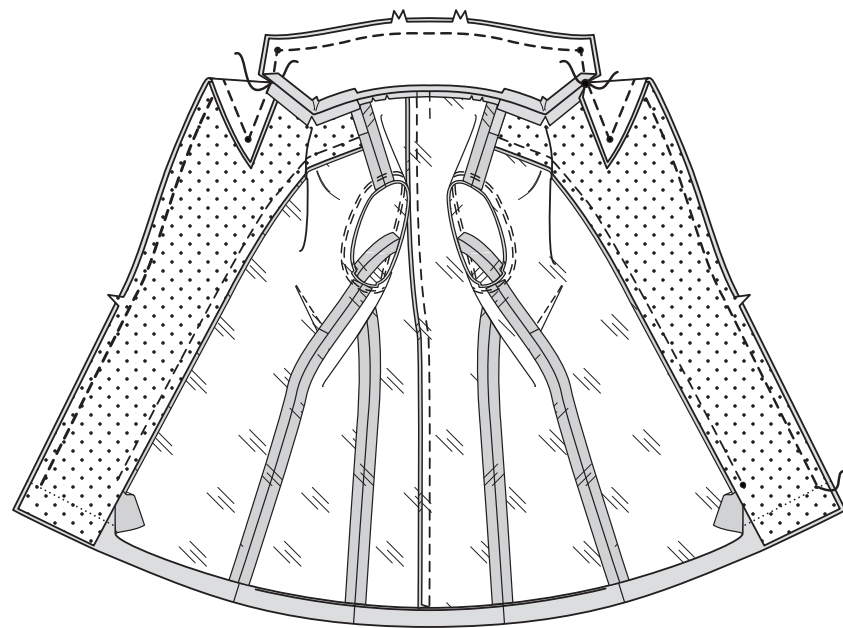


28. Stitch across lower edge of facing along hemline from front edge to 5/8" (1.5cm) from inside edge, keeping lining free. Trim facing to 5/8" (1.5cm) from hemline stitching. Trim jacket to 1" (2.5cm) from inner edge of facing.




29. Turn garment right side out bringing neckline seams together. On outside, pin lower edges of upper and under collar between shoulder seams just above the neckline seam.

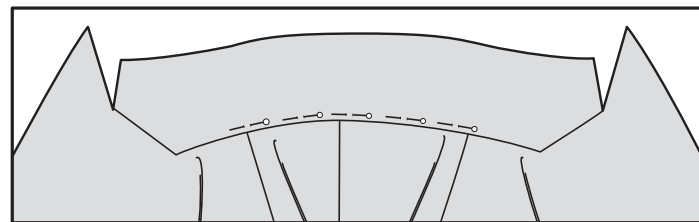


30. On inside, catchstitch collar seam allowances together as pinned. Remove pins.

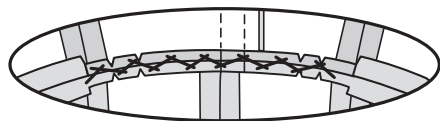


31. Turn jacket inside out again. With right sides together, pin lining to lower edge of jacket, matching seams. Stitch, leaving an opening for turning.

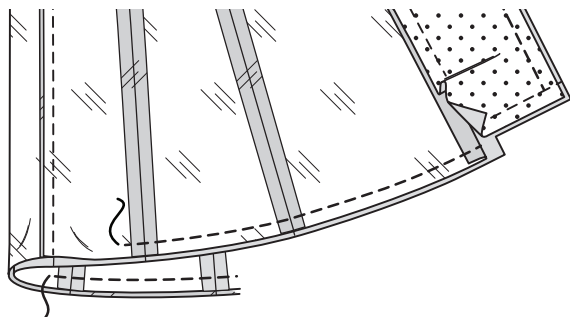


32. Press up hem allowance on lower edge. Catchstitch hem in place, keeping lining free at opening.

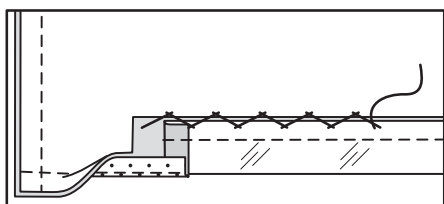


33. Turn jacket right side out through opening. Press, pressing collar and lapel along roll line.

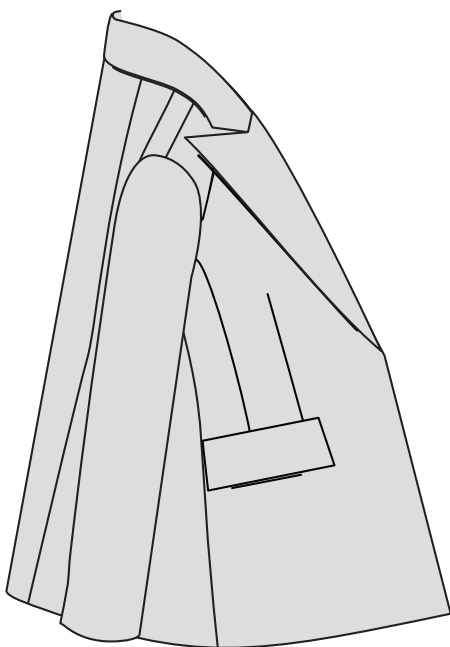

34. Pull both jacket and lining sleeves through opening on lower edge of jacket, separating jacket sleeve from lining sleeve. Open out pressed hem on sleeve. Pin lower edge of lining to lower edge of sleeve with right sides together, matching small circles. Stitch from small circle to extension edge.

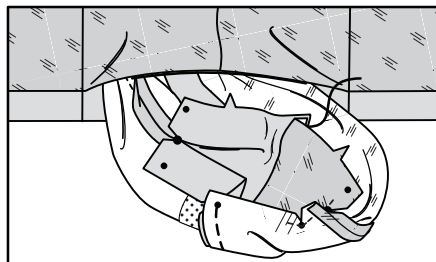


35. Pin under sleeve fabric and lining extensions together, matching notches, pressing sleeve and lining up along sleeve hemline. Stitch. **NOTE:** A pleat will form at lower side edge of lining for wearing ease.




36. Pull sleeve back through opening, having sleeve lining side out. Pin front seams of lining and sleeve together to keep sleeve from turning while you work on finishing the vent area. Press under upper and remaining side edge of upper sleeve lining.




37. Lap under sleeve extension over upper sleeve facing, having edge of upper sleeve at placement line and pulling out upper edges. Stitch upper edges together between large circle and small circle.

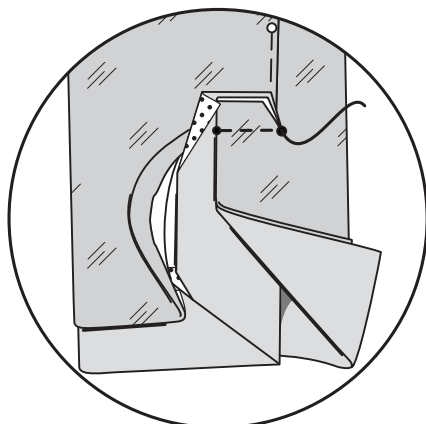


38. SLIPSTITCH side and upper pressed edges of lining as shown. Remove pins. **NOTE:** A pleat will form at lower side edge of lining for wearing ease.

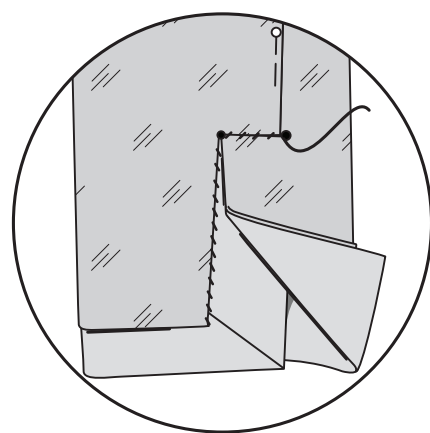


39. SLIPSTITCH lower opening edge of lining to hem of garment.

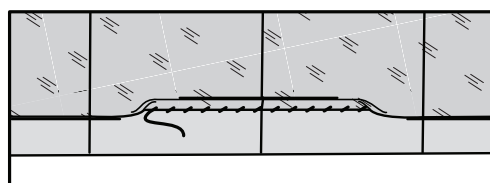

40. Cover buttons following manufacturer's directions. On outside, sew three 5/8" (1.5cm) buttons to each vent opening through all layers of the sleeve at markings.




41. Make buttonhole on right side of jacket front. Sew button to left front.

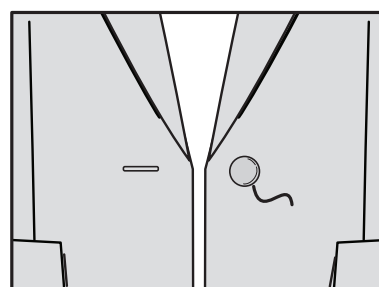


PANTS


1. STAYSTITCH upper edge of FRONT (17). To form crease on front, fold fabric along foldline, with wrong sides together. **EDGESTITCH** full length of crease.

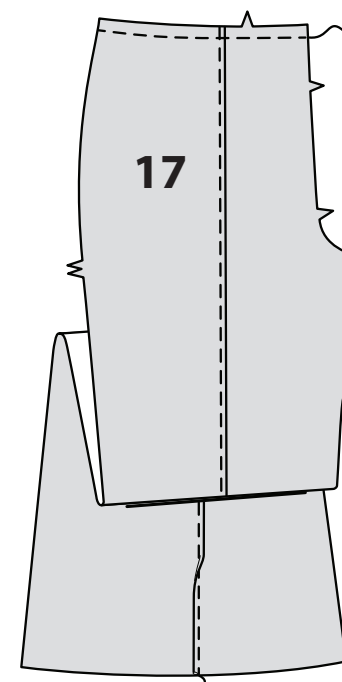


2. With right sides together, pin front sections, matching symbols. Stitch center front seam from inner leg to large circle. Backstitch at circle to reinforce seam.

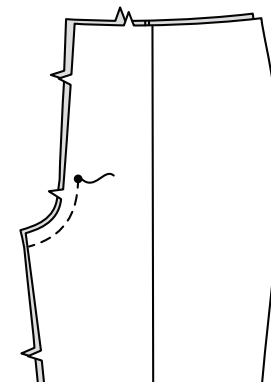


3. Apply **INTERFACING** to FLY (18). **FINISH** unnotched edge. With right sides together, pin fly to right front edge, matching large circles. Stitch above the circle. Backstitch. Trim seam above circle to 1/4" (6mm).




4. Open out fly. Place closed zipper, face down over fly with top end of zipper 7/8" (2.2cm) from upper edge, having edge of zipper tape extending 1/4" (6mm) over fly seam as shown. Stitch zipper on right edge of tape from upper to lower edge of fly, using an adjustable zipper foot. Zipper will extend below lower edge of fly. Do not trim away excess at this time.

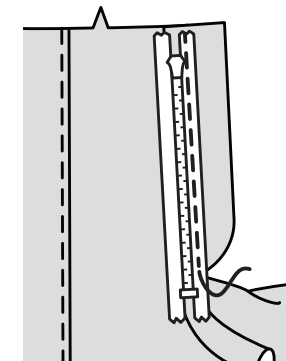

5. Turn fly to inside; press. Pin in place. Press under 3/8" (1cm) on left front above large circle.



6. Open zipper. Pin left front over zipper tape close to teeth. Baste. Close zipper and make sure it is aligned on both fronts.

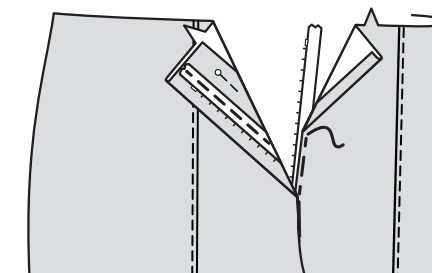

7. Fold **EXTENSION** (19) in half lengthwise, with wrong sides together, having raw edges even. Machine-baste raw edges; press. **FINISH** notched and lower edges.

