




USE AS RECESSED FITTING

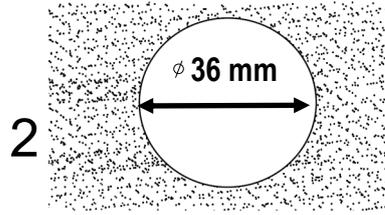




USE DRILL WITH  $\phi 36\text{mm}$   
CUT TOOL

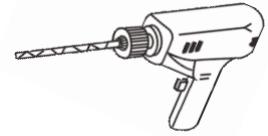


FOR MULTIPLE ASSEMBLY, ALL LED LIGHTS MUST BE CONNECTED IN SERIES TO A CONSTANT CURRENT 700mA LED DRIVER.

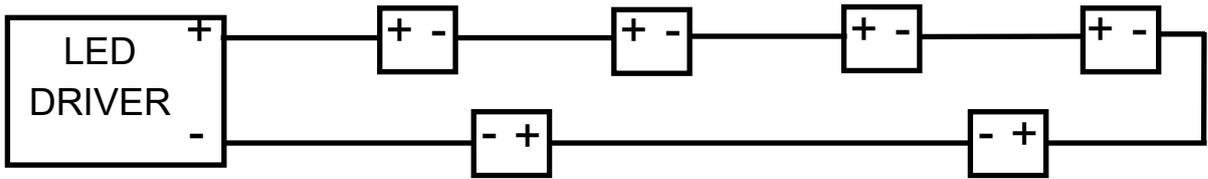


CONNECT TO 700mA LED DRIVER

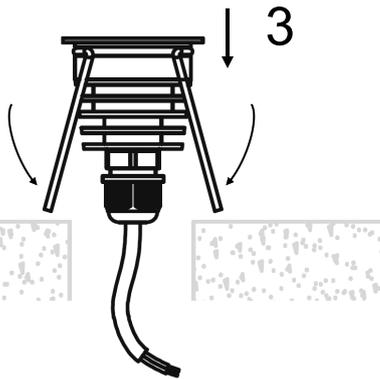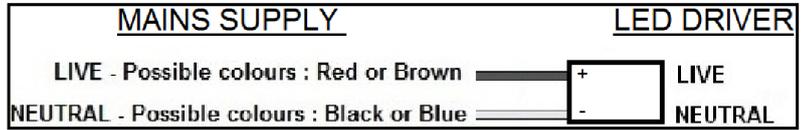





USE AS RECESSED IN GROUND

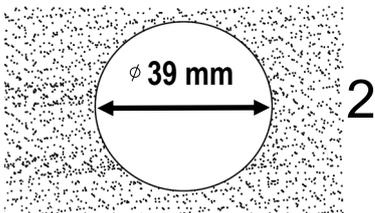

USE DRILL WITH  $\phi 39\text{mm}$   
CUT TOOL

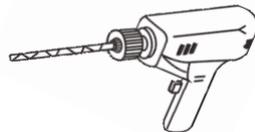

CONNECT TO 700mA LED DRIVER

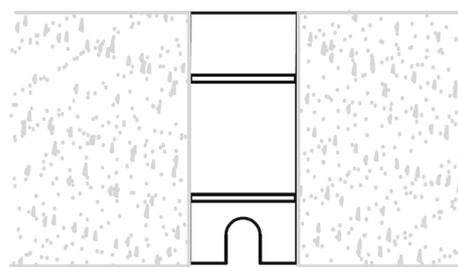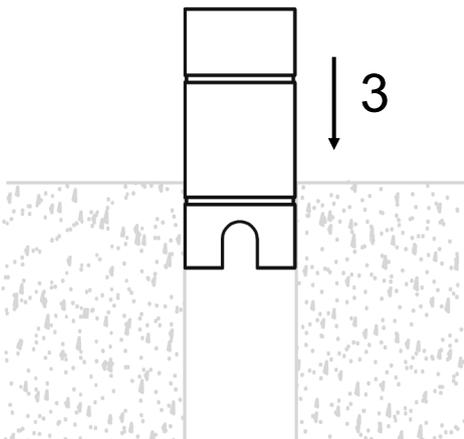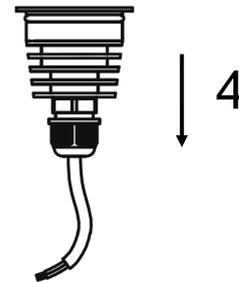

## **SAFETY INFORMATION: (Please retain for future reference)**

- Always turn off the mains supply before commencing the installation of this fitting .
- This is a Class 3 product and does not requires an Earth connection. Do not connect directly to mains supply – 230 (240) Volts – 50Hz AC, must be connected in series to a 700mA constant current LED Driver.
- This product must be installed in accordance with the National Building Regulations, if in doubt consult a competent electrician.
- Do not modify or alter any product before or after installation. This will invalidate your warranty and may render the product un-safe.

### **POSITION:**

- The fitting is suitable for installation in outdoor locations.
- The fitting is NOT suitable for installation in Marine locations.
- The fitting is IP67 rated, we recommend the fitting is not installed where it may become Immersed under water for periods longer than 30 minutes, or depths greater than 1metre.
- The fitting should be installed in areas with adequate drainage.
- Ensure sufficient access to the fitting to enable safe maintenance.
- The luminaire should be positioned so that prolonged staring into the luminaire at a distance closer than 0.2M is not expected.

### **LED INFORMATION:**

- This fitting is suitable for dimming when connected to a LED Dimmable Driver.
- The LED lamps are not replaceable, when the lamps reach the end of their life the whole luminaire shall be replaced.

### **AFTERCARE AND MAINTENANCE:**

- Always disconnect power supply when servicing or cleaning.
- Clean only with a dry or slightly damp cloth.
- Do not use any abrasive cloths or cleaners as this may damage the product.

