


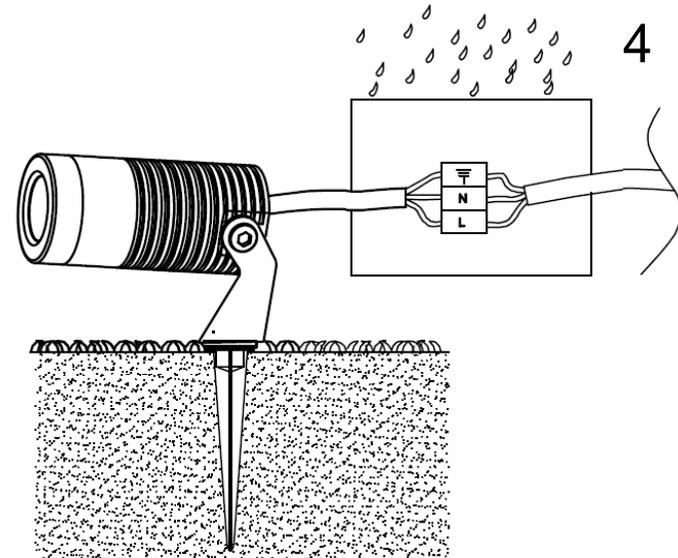


OD-FARR- Farringdon Spike Spot 8W LED

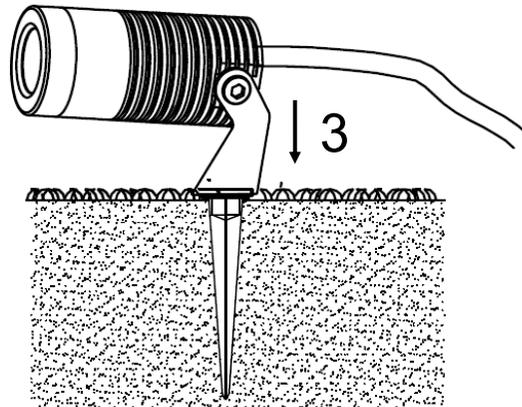

MUST BE CONNECTED TO A TERMINAL BLOCK WITH AN IP RATED BOX (NOT SUPPLIED)

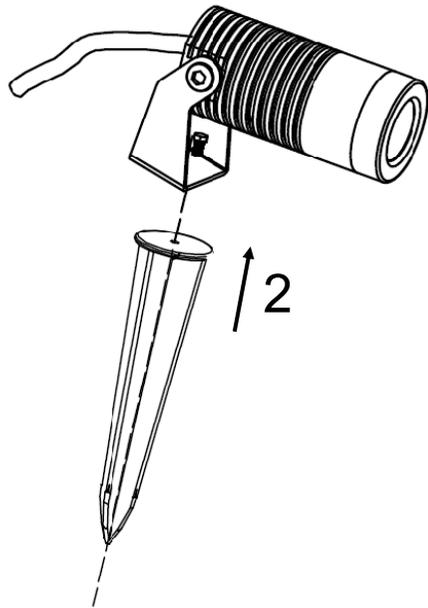


INCOMING SUPPLY

- LIVE - Possible colours: Red or (Brown)
- EARTH - Un-sleeved copper or (Green / Yellow)
- NEUTRAL - Possible colours: Black or (Blue)

LIGHT FITTING

- LIVE
- EARTH
- NEUTRAL



SAFETY INFORMATION: (Please retain for future reference)

- Always turn off the mains supply before commencing the installation of this fitting .
- This is a Class 1 product and does requires an Earth connection – 230 (240) Volts 50Hz.
- We recommend to be used suitable waterproof connector block for the wiring connections.
- This product must be installed in accordance with the National Building Regulations, if in doubt consult a competent electrician.
- Do not modify or alter any product before or after installation. This will invalidate your warranty and may render the product un-safe.

POSITION:

- The fitting is suitable for installation in outdoor locations.
- The fitting is NOT suitable for installation in Marine locations.
- The fitting is IP67 rated, we recommend the fitting is not installed where it may become immersed under water for periods longer than 30 minutes, or depths greater than 1metre.
- The fitting should not be installed in areas where flooding may occur.
- Ensure sufficient access to the fitting to enable safe maintenance.
- The luminaire should be positioned so that prolonged staring into the luminaire at a distance closer than 0.2M is not expected.

LED INFORMATION:

- This fitting is NOT suitable for dimming.
- The LED lamps are not replaceable, when the lamps reach the end of their life the whole luminaire shall be replaced.

AFTERCARE AND MAINTENANCE:

- Always disconnect power supply when servicing or cleaning.
- Clean only with a dry or slightly damp cloth.
- Do not use any abrasive cloths or cleaners as this may damage the product.

