
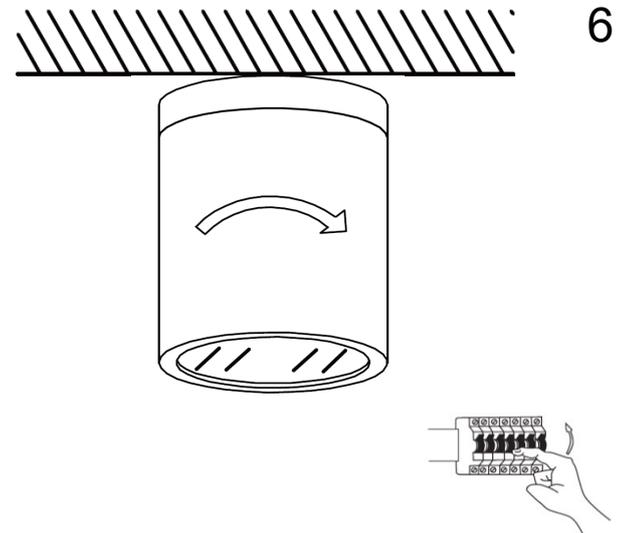
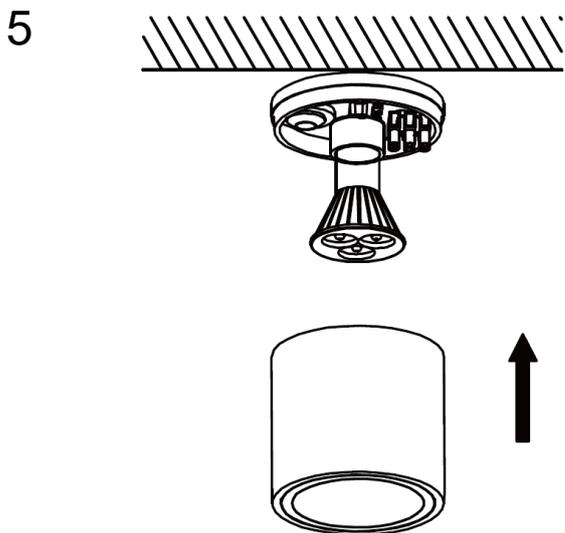


MAINS SUPPLY

LIGHT FITTING

LIVE - Possible colours : Red or Brown ———— LIVE
 ⊕ EARTH - Un sleeved copper or (Green / Yellow) ———— EARTH ⊕
 NEUTRAL - Possible colours : Black or Blue ———— NEUTRAL

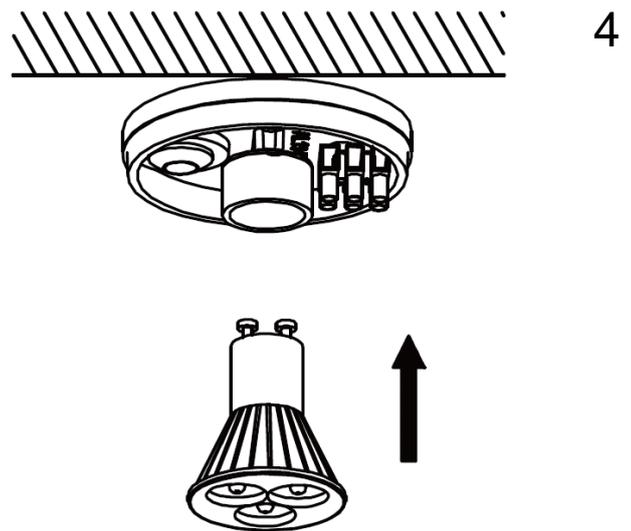

SAFETY INFORMATION: (Please retain for future reference)

- Always turn off the mains supply before commencing the installation of this fitting .
- This is a Class I product and requires an Earth connection – 220 (240) Volts – 50/60Hz AC.
- This product must be installed in accordance with the National Building Regulations, if in doubt consult a competent electrician.
- Do not cover the light source or lamp shade.
- Do not modify or alter any product before or after installation. This will invalidate your warranty and may render the product un-safe.

POSITION


- This fitting is IP65 rated and suitable for Indoor and Outdoor locations.
- This fitting is suitable for bathroom Zone 1 and 2 installations.
- Zone 1 covers the area above the bath or shower up to height of 2.25 meters and carries a minimum rating of IPX5.
- Zone 2 covers an area 0.6 meters wide immediately next to, and all around zone 1, plus the area below 2.5 meters high directly over the bath or shower. Wash basins should be treated as a zone 2.
- The minimum rating here is IPX4.
- Where water jets are likely to be used for cleaning proposes in zone 1 or 2, the rating is a minimum IPX5
- Suitable for ceiling mount only.
- Ensure sufficient access to the fitting to enable safe maintenance.

LAMP INFORMATION:

- We recommend LED lamps only.
- Please ensure you will not exceed the maximum wattage stated on the product.
- This fitting is suitable for dimming when using suitable dimmable LED lamps..

AFTERCARE AND MAINTENANCE:

- Always disconnect power supply when servicing or cleaning.
- Clean only with a dry or slightly damp cloth.
- Do Not use any abrasive cloths or cleaners as this may damage the product.

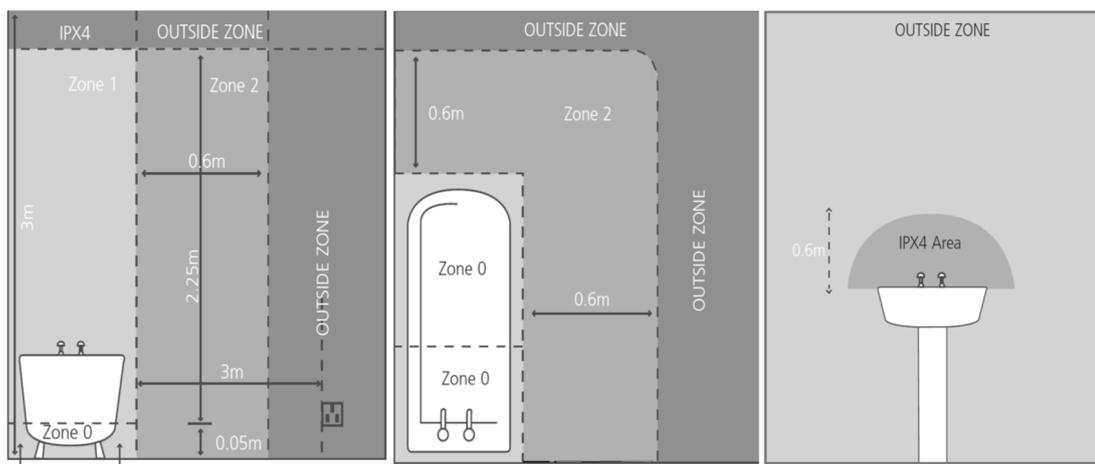

This symbol on the product indicates that this must not be disposed of with your other household waste. It is your responsibility to dispose of your waste equipment by handing it over to a designated collection point for the recycling of wasted electrical and electronic equipment. For more information about where you can drop off your waste equipment for recycling, please contact your local city officer, your household waste disposal service or the shop where you purchased the product.

